


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 2 Twp. 22 Rge. 14 (E) 14 (W)

Location as "NE/CNW*SW*" or footage from lines SE NW SE
Lease Owner White Hawk Oil Company
Lease Name Wetig Well No. 2
Office Address P. O. Box 1150, Great Bend, Kansas 67530
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed August 22, 19 81
Application for plugging filed June 5, 19 81
Application for plugging approved June 16, 19 81
Plugging commenced August 5, 19 81
Plugging completed August 6, 19 81
Reason for abandonment of well or producing formation Depleted

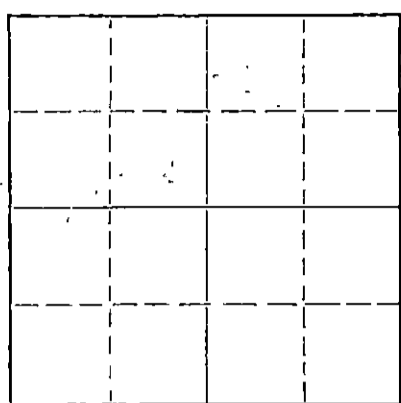

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production: May 25, 19 81
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. H. Metz
Producing formation Lansing Depth to top 3492 Bottom 3552 Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations. PBTD 3592 TD 3775

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TD	SIZE	PUT IN	PULLED OUT
				8-5/8"	338	None
				5-1/2"	3773	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Pump down 5 1/2" - 3 sacks hulls, 25 sacks cement, 2 sacks hulls, 25 sacks gel, 75 sacks cement - 400#

Pump down 8-5/8" - 50 sacks cement - 200#

(Cement Used - 50-50 pozmix 3% Gel, 3% Calcium Chloride)

Filled 8-5/8" and 5 1/2" with 3 1/2 yards Ready Mix Cement


RECEIVED
STATE OF KANSAS
AUG 10 1981 8-10-81
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address

STATE OF Kansas, COUNTY OF Barton, ss. Rebecca A. Dunlap (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above described well as filed and that the same are true and correct. So help me God.

(Signature) Rebecca A. Dunlap
P. O. Box 1150, Great Bend, Kansas 67530
(Address)



SUBSCRIBED AND SWORN TO before me this 7th day of August, 19 81
Richard R. Brack
Notary Public.

My commission expires August 6, 1983