


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Stafford County. Sec. 27 Twp. 22 Rge. 12 (W) (W)  
Location as "NE/CNW/SW" or footage from lines NE/4 NE/4 NW/4  
Lease Owner Transit Corporation - Davis Brothers  
Lease Name Scheib Well No. 1  
Office Address 1516 Liberty Bank Building, Oklahoma City, Oklahoma  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 9-17-1956  
Application for plugging filed 9-17-1956  
Application for plugging approved 9-17-1956  
Plugging commenced 9-17-1956  
Plugging completed 9-17-1956  
Reason for abandonment of well or producing formation Dry Hole

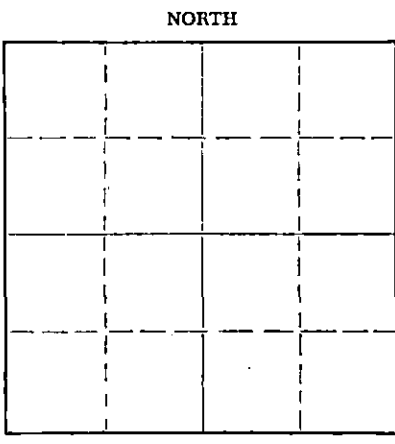

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well R. M. Brundege  
Producing formation \_\_\_\_\_ Depth to top \_\_\_\_\_ Bottom \_\_\_\_\_ Total Depth of Well 3711 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	225'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from \_\_\_\_\_ feet to \_\_\_\_\_ feet for each plug set.

Filled hole with heavy drilling mud to 210 feet, set plug and cemented through drill pipe with 20 sacks cement.  
Filled hole with heavy drilling mud to 40 feet, set plug and cemented with 10 sacks of cement to bottom of cellar.

9-22-56

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Transit Corporation  
Address 1516 Liberty Bank Building, Oklahoma City 2, Oklahoma

STATE OF OKLAHOMA, COUNTY OF OKLAHOMA, ss.  
G. W. Dodson (employee of owner) or (~~owner or operator~~) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) G. W. Dodson  
Liberty Bank Building  
(Address)

SUBSCRIBED AND SWORN TO before me this 20th day of September, 19 56

Francis C. Terry  
Notary Public.

My commission expires March 31, 1960.

PLUGGING  
FILE SEC. 27T 22R 12W  
BOOK PAGE 100 LINE 41

TRANSIT CORPORATION - DAVIS BROTHERS

SCHEIB #1

NE NE NW Sec. 27-22S-12W, Stafford County, Kansas

Total Depth: 3711'  
 Commenced: 9-3-56  
 Completed: 9-17-56

Elevation: 1867' DF  
 Casing: 8 5/8" @ 225';  
 150 sacks Poxmix

<u>Formation</u>	<u>Depth</u>
Clay, sand, redbed	225'
Shale & shell	1000
Shale	1290
Salt & shale	1495
Sandy lime	1545
Shale & lime	2530
Bro. sand & shale	2620
Shale	2940
Shale & lime	3067
Lime	3125
Lime & shale	3323
Lime	3450
Lime & shale	3580
Conglomerate	3635
Viola Lime & chert	3658
Lime	3677
Shale	3687
Lime	3711

I hereby certify the foregoing to be a true and accurate Driller's Log to the best of my knowledge.

C. W. Dodson  
 C. W. Dodson

Subscribed and sworn to before me this 20th day of September, 1956.

My commission expires Mar. 31, 1960.

Frances C. Terry  
 Notary Public

