


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD
OR
FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

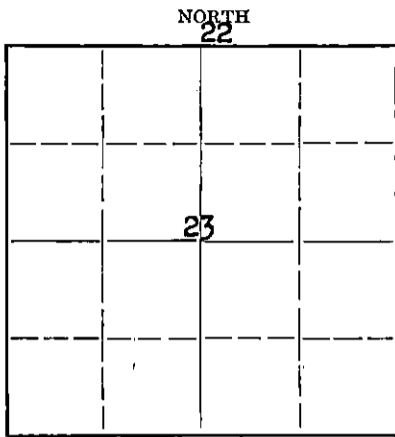

Locate well correctly on above
Section Plat

Stafford County, Sec. 23 Twp. 22 Rge. 12 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. CNL NW 1/4, SE 1/4

Lease Owner D. R. Buchanan

Lease Name Lantermann Well No. 1

Office Address 301 Hoke Building, Hutchinson, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) dry

Date well completed October 3 19 43

Application for plugging filed October 3 19 43

Application for plugging approved October 3 19 43

Plugging commenced October 3 19 43

Plugging completed October 3 19 43

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Rule Durkee

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3685 Feet


Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

Formation	Content	From	To	Size	Feet	Pulled Out
				8-5/8	201	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with heavy rotary mud bottom to 201'.
15 Sacks cement, then filled to 10' of top
with heavy rotary mud, then 5 sacks cement to top.

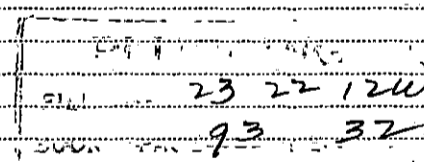

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to False Billings Co. Inc
Address 301 - Hoke Bldg. Hutchinson Kansas

STATE OF Kansas, COUNTY OF Reynolds, SS.
Clyde Durkee (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]
301. Hoke Bldg. Hutchinson Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 6th day of October, 1943
[Signature]
My commission expires Sept 9, 1946 Notary Public.

LOG: LANTERMAN #1 WELL CNL, NW/4, SE/4, SEC. 23, TWP. 22, RGE. 12, STAFFORD COUNTY, Ks.

OWNER: D. R. BUCHANAN, WASHINGTON, PENNA.

DRILLERS: FULSE DRILLING COMPANY, HUTCHINSON, KANSAS.

COMMENCED: AUGUST 11, 1943.

COMPLETED: OCTOBER 2, 1943.

Surface	20
Sand	150
Shale and Sand	180
Red Beds	400
Red Rock & Shells	885
Shale and Shells	1135
Salt	1375
Shale and Shells	1590
Shale	1690
Lime	1855
Broken Lime	1995
Shale	2045
Shale and Shells	2828
Lime (Topeka)	3088
Broken Lime	3205
Shale	3316
Lime (K C)	3512
Congglomeration	3569
Lime	3571
Chert (Viola)	3603
Sand, Shale	3675 (small show oil)
Lime (Siliceous)	3685 T D

small show oil 3677 to 3680 Dry
and abandoned.

- - - - CASING RECORD - - - -

201' of 8-5/8" casing. Cemented with 150 sacks cement.

REMARKS:

Lost circulation at 3088' for 96 feet & 22 days. Used 120 tons mud, 50 tons bran, 5 tons hulls, 2 tons fibertex, 1 ton Dowell Celephane, 20 tons Impermix, several truck loads manure & Alfalfa cuttings, 500 sacks cement and 4 cementing jobs!