


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

WELL PLUGGING RECORD

15-185-00631-0000

NORTH

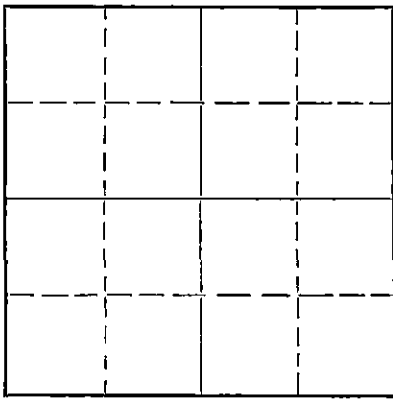

Locate well correctly on above
Section Plat

Stafford County, Sec. 1 Twp. 23 Rge. (E) 13 (W)
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines NW NW NW
Lease Owner Finston Et al
Lease Name Witt Well No. 1
Office Address 108 Mayo Building Tulsa, Oklahoma
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 6-25 19 50
Application for plugging filed 7-25 19 50
Application for plugging approved 7-25 19 50
Plugging commenced 7-25 19 50
Plugging completed 8-4 19 50
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Staugh
Producing formation Depth to top Bottom Total Depth of Well Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	254	- 0-
				5 1/2	3811	3123

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with egg rock to 3800' and dumped 5 sacks cement. Mudded hole. Set fresh water plug at 250' and dumped 15 sacks cement. Mudded hole to 30' and dumped 10 sacks cement.

RECEIVED
AUG 9 - 1950
STATE CORPORATION COMMISSION
KANSAS

8-9-50

(If additional description is necessary, use BACK of this sheet)
Correspondence regarding this well should be addressed to W. C. McBride
Address Box 433
McPherson, Kansas


STATE OF Kansas; COUNTY OF Sedgewick, ss.
W. R. Murphy (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. R. Murphy

(Address)

SUBSCRIBED AND SWORN to before me this 8th day of August, 1950

My commission expires 3-5-52
Genevieve Nays Notary Public.



for Corp Comm

15-185-00631-0000

KANSAS WELL LOG BUREAU --- KANSAS GEOLOGICAL SOCIETY

508 EAST MURDOCK - WICHITA, KANSAS

COMPANY Finston, Murfin, et al

SEC. 1 T. 23 R. 13W

FARM Witt

NO. 1

LOC. NW NW NW

TOTAL DEPTH 3820

COMM. 6-9-50


COMP. 6-25-50

COUNTY Stafford

SHOT OR TREATED

CONTRACTOR Murfin Drilling Co.

ISSUED



CASING

20 10
15 8 254
12 6
13 5 3811

ELEVATION 1859 DF

PRODUCTION Dry

FIGURES INDICATE BOTTOM OF FORMATIONS

110 sand, shale
245 shale
257 red shale-shells
375 red bed
720 red bed-shale
745 anhydrite
885 shale
1300 red bed, shale & shells
1335 shale-shells
1600 shale-lime
1865 lime
1950 lime-shale
2030 lime
2450 lime-shale
2560 lime
2920 shale-lime
3295 lime
3375 shale-lime
3394 shale
3585 lime
3650 lime-shale
3725 lime-chert
3755 chert-shale
3785 shale-sand
3810 shale
3815 lime (Arb.)
3820 lime
T.D.


Tops

Heebner 3237 (-1375)
Brown Lime 3375 (-1516)
Lans.-K.C. 3394 (-1535)
Cong. 3654 (-1792)
Viola 3695 (-1833)
Simpson 3747 (-1885)
Arbuckle (3810 (-1948)
T.D. 3820

Well swabbed 75 bbl. in 8 hrs. - no water.
Put on pump & went to 90% water - oil -
18 gravity. Well abandoned. —

STATE OF KANSAS)
SS:
SEDGWICK COUNTY)

I, W. R. Murfin, of the Murfin Drilling Co., a partnership, contractor engaged for the drilling of the No. 1 Witt well, located in the NW NW NW of Section 1, Township 23, Range 13 West, Stafford County, Kansas, upon oath state that the above and foregoing is a true and correct copy of the log of said well.

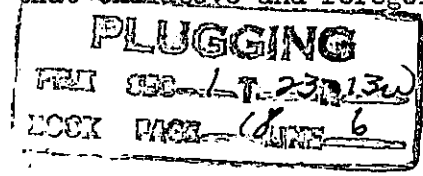

W. R. Murfin
W. R. Murfin

Subscribed and sworn to before me this 8th day of August, 1950.

Genevieve Hays
Notary Public

My Commission Expires: 3-5-52