

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-093-00633-00-00
Spot: SWSWNE Sec/Twnshp/Rge: 35-22S-37W
2665 feet from S Section Line, 2327 feet from E Section Line
Lease Name: DAVIS Well #: 1
County: KEARNY Total Vertical Depth: 2657 feet

Operator License No.: 33790
Op Name: BEYMER BROTHERS, A GENERAL PAR
Address: PO BOX 363
LAKIN, KS 67860

String	Size	Depth (ft)	Pulled (ft)	Comments
CIBP		925		
CIBP		2100		
PROD	5.5	2700	0	WITH 150 SX CMT
SURF	8.625	770		WITH 500 SX CMT

Well Type: GAS UIC Docket No: _____ Date/Time to Plug: 03/01/2017 8:00 AM
Plug Co. License No.: 34612 Plug Co. Name: EXACT WELL SERVICE LLC
Proposal Rcvd. from: GARY PISTER Company: EXACT WELL SERVICE LLC Phone: (620) 626-9779

Proposed Plugging Method: PLUGGING PROPOSAL SAME AS ACTUAL PLUGGING.

Plugging Proposal Received By: KEN JEHLIK WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/01/2017 11:00 AM KCC Agent: KEN JEHLIK

Actual Plugging Report:

CIBP @ 2100' WITH 2 SX CMT. CIBP @ 925'. TEST CASING TO 800#. HOLDING. PERFORATE 3 HOLES AT 900'. INJECTION RATE 4 BPM @ 100 PSI DOWN 5 1/2" CASING. MIX & PUMP 230 SX CMT VIA 5 1/2" CASING THROUGH PERFS AT 900'. FULL CIRCULATION. LEFT THE 5 1/2" CASING AND THE 5 1/2" X 8 5/8" ANNULUS FULL OF CMT. HAD FULL RETURNS. HOLE STAYED FULL.

Perfs:


Top	Bot	Thru	Comments
2561	2580	OH	

Remarks: USED 60/40 POZMIX 4% GEL BY CONSOLIDATED.

Plugged through: CSG

District: 01

Signed

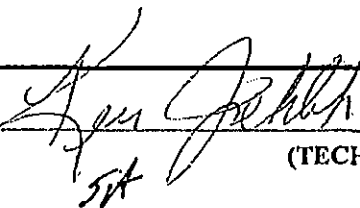

(TECHNICIAN)

RECEIVED
MAR - 2 2017
KCC DODGE CITY

INVOICED
MAR 28 2017