

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-077-21418-00-00  
Spot: SWSWNE Sec/Twnshp/Rge: 30-32S-7W  
2970 feet from S Section Line, 2310 feet from E Section Line  
Lease Name: MASNER Well #: 1-23  
County: HARPER Total Vertical Depth: 4418 feet

Operator License No.:	String	Size	Depth (ft)	Pulled (ft)	Comments
<u>8061</u>	PROD	4.5	4398		100 SX
Op Name: <u>OIL PRODUCERS, INC. OF KANSAS</u>	SURF	8.625	277		175 SX
Address: <u>1710 WATERFRONT PKWY</u> <u>WICHITA, KS 67206</u>					

Well Type: OG UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 12/10/2016 12:00 AM  
Plug Co. License No.: 34141 Plug Co. Name: MOHEGAN WELL SERVICE, LLC  
Proposal Rcvd. from: JORDAN DISKIN Company: OIL PRODUCERS INC OF KANSAS Phone: (316) 681-0231

Proposed Plugging Method: PER KCC REQUIREMENTS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: NONE  
Date/Time Plugging Completed: 02/24/2017 3:30 PM KCC Agent: STEVE VANGIESON

Actual Plugging Report:

A CIBP WAS SET 4350' & CAPPED 2 SKS CEMENT. PERF CASING AT 1250'. RUN TUBING TO 1250' SPOTTED 50 SX CEMENT. PERF'D AT 800'. RAN TUBING TO 800' & SPOTTED 50 SX CEMENT. PERF'D AT 340' & CIRCULATED CEMENT TO SURFACE WITH 120 SX CEMENT.

Perfs:


Top	Bot	Thru	Comments
4398	4418		

Remarks: HURRICAN CEMENT. COMMON CEMENT. 3% CACL. COMPLIANCE - DENIED TA

Plugged through: TBG

District: 02

Signed \_\_\_\_\_

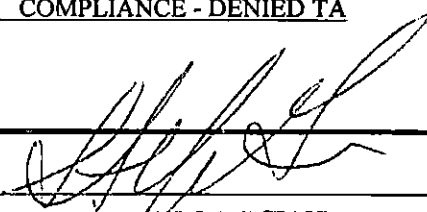

(TECHNICIAN)

INVOICED

Form CP-2/3

INVOICED

MAR 28 2017

