

TO:  
STATE CORPORATION COMMISSION  
CONSERVATION DIVISION - PLUGGING  
266 N. Main St., Ste. 220  
Wichita, KS 67202-1513

API Well Number: 15-077-21919-01-00  
Spot: SWSESESW Sec/Twnshp/Rge: 17-35S-6W  
260 feet from S Section Line, 2300 feet from W Section Line  
Lease Name: SOUTH POINT FARMS 3506 Well #: 1-17H  
County: HARPER Total Vertical Depth: 4920 feet

Operator License No.: 34192  
Op Name: SANDRIDGE EXPLORATION AND PRO  
Address: 123 ROBERT S. KERR AVE  
OKLAHOMA CITY, OK 73102

String	Size	Depth (ft)	Pulled (ft)	Comments
COND	20	106		10 sx cement
	11	7	5602	450 sx cement
PROD	4.5	9010		0 SX
SURF	9.63	649		440 SX

Well Type: OIL UIC Docket No: \_\_\_\_\_ Date/Time to Plug: 02/22/2017 8:00 AM  
Plug Co. License No.: 33338 Plug Co. Name: ORR ENTERPRISES, INC.  
Proposal Rcvd. from: RONNIE ORR Company: ORR ENTERPRISES, INC. Phone: (405) 429-6002

Proposed Plugging Method: AS PER KCC RULES & REGS

Plugging Proposal Received By: STEVE VANGIESON WitnessType: PARTIAL  
Date/Time Plugging Completed: 02/22/2017 4:30 PM KCC Agent: STEVE VANGIESON

**Actual Plugging Report:**

A 7" CIBP WAS SET AT 5300' ON TUBING. THE PLUG WAS RELEASED & MUD WAS CIRCULATED INSIDE THE 7". A 25 SX CEMENT PLUG WAS THEN SPOTTED ON THE CIBP. THE CASING WAS RECOVERED FROM 1168' AND LAYED DOWN. RAN 2 7/8" TUBING TO 1150', WHERE 50 SX OF CEMENT WAS SPOTTED. PULLED TUBING TO 680' & SPOTTED 50 SX CEMENT TO SURFACE WITH 100 SKS CEMENT.

**Perfs:**


Top	Bot	Thru	Comments
8617	8868		
8323	8588		
7962	8228		
7528	7830		
7194	7485		
6762	7129		
6345	6675		
5960	6280		
5618	5860		

Remarks: ORR ENTERPRISES. CLASS C CEMENT. (MTD = 9010)

Plugged through: TBG

District: 02

Signed \_\_\_\_\_

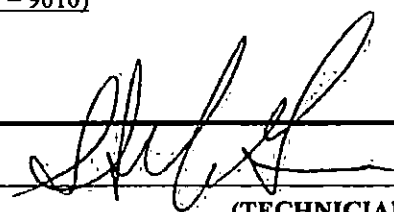

(TECHNICIAN)

INVOICED

MAR 28 2017

Form CP-2/3

18