

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Hodgeman County, Sec. 12 Twp. 22S Rge. (E) 22 (W)

Location as "NE/CNW/SE" or footage from lines C/SE SE
Lease Owner Cameron K. Reed
Lease Name Pitts Well No. 1
Office Address 20 West 9th Street, Kansas City, Missouri 64105
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed October 3 19 68
Application for plugging filed October 3 19 68
Application for plugging approved October 3 19 68
Plugging commenced October 3 19 68
Plugging completed October 3 19 68
Reason for abandonment of well or producing formation Dry Hole



Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves, Sublette, Kansas
Producing formation Depth to top Bottom Total Depth of Well 4435' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	8-5/8"	0	288.47'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged hole as follows: Set plug at 900' and plugged with pump truck with 100 cubic feet of posmix and 6% gel to 600'; plugged at 600' with 20 barrels of mud to 290'; plugged at 290' with 30 cubic feet of posmix and 6% gel to 200'; plugged at 200' with 10 barrels of mud to 40'; plugged at 40' with 10 cubic feet posmix and 6% gel to 0'. Plug down at 5:00 P. M. October 3, 1968.

RECEIVED
STATE CORPORATION COMMISSION
OCT 8 1968
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Strata Drilling, Inc.
Address P. O. Box 355, Great Bend, Kansas 67530

STATE OF KANSAS, COUNTY OF BARTON, ss.
Charler W. Steincamp (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Charles W. Steincamp
Charles W. Steincamp
P. O. Box 355, Great Bend, Kansas 67530
(Address)

Subscribed and sworn to before me this 4th day of October, 1968

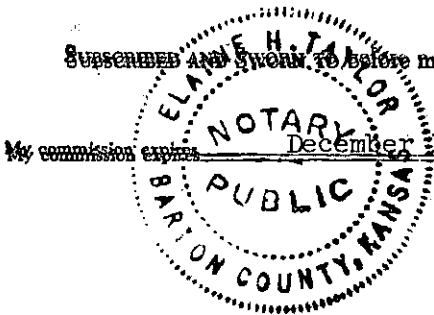

Elaine H. Taylor
Notary Public

D R I L L E R S L O G

#1 Pitts

CASING RECORD: 282.47' of new 8-5/8" surface casing.	COMPANY: Cameron K. Reed	DESCRIPTION: C/SE SE Section 12-22S-22W Hodgeman County, Kansas
TOTAL DEPTH: 4435'	CONTRACTOR: Strata Drilling, Inc.	ELEVATION: 2149' KB
	COMMENCED: September 23, 1968	
	COMPLETED: October 3, 1968	

D. & A.

<u>FORMATION</u>	<u>FROM</u>	<u>TO</u>	<u>REMARKS</u>	
Ground & Sand	0	78	Ran 282.47' of new 8-5/8" surface casing; set and cemented at 288.47' with 175 sacks of regular cement and 2% gel. Plug down at 1:30 A. M. September 24, 1968.	
Clay, Shale & Sand	78	280		
Shale	280	530		
Shale & Red Bed	530	653		
Anhydrite	653	670		
Red Bed	670	750		
Dakota Sand	750	950		
Red Bed & Shale	950	1304		
Anhydrite	1304	1335		
Shale, Shells & Red Bed	1335	1490		
Shale & Lime	1490	2404		
Lime	2404	2730		
Shale & Lime	2730	3835		Ran Welex log.
Lime	3835	4435		

Total Depth 4435'

D. & A.

Plugged hole as follows: Set plug at 900' and plugged with pump truck with 100 cubic feet of posmix and 6% gel to 600'; plugged at 600' with 20 barrels of mud to 290'; plugged at 290' with 30 cubic feet of posmix and 6% gel to 200'; plugged at 200' with 10 barrels of mud to 40'; plugged at 40' with 10 cubic feet posmix and 6% gel to 0'. Plug down at 5:00 P. M. October 3, 1968.

RECEIVED
STATE CORPORATION COMMISSION

STATE OF KANSAS)
) ss.
COUNTY OF BARTON)

OCT 8 - 1968
CONSERVATION DIVISION
Wichita, Kansas

I certify that this is a true and correct copy of the above log to the best of my knowledge.

STRATA DRILLING, INC.

Charles W. Steincamp
Charles W. Steincamp, President

Subscribed and sworn to before me this 4th day of October, 1968.

My Commission Expires:
December 14, 1969

Elaine H. Taylor
Elaine H. Taylor, Notary Public

