

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Hodgeman

County. Sec. 9 Twp. 22 Rge. (E) 22 (W)

Location as "NE/CNW/SW" or footage from lines _____

Lease Owner James Hershberger

Lease Name Miller Well No. _____

Office Address 801 1059 First Nat'l Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry

Date well completed 2/7/64 19

Application for plugging filed 2/7/64 19

Application for plugging approved 2/7/64 19


Plugging commenced 2/7/64 8 A.M. 19

Plugging completed 2/7/64 10:30 A.M. 19

Reason for abandonment of well or producing formation Dry hole

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Hugh Scott

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4700 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Lansing	Water	3935	4306	8 5/8	282	None
Mississippi	Water	4554	T.D.			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Mud to 700' 25 sax cement pumped W/SWM Truck
Mud to 275- 25 sax cement pumped
Mud to 90'- Halls & 15 sax cement

RECEIVED
STATE CORPORATION COMMISSION

FEB 17 1964

CONSERVATION DIVISION
Wichita, Kansas

2-17-64

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rotary Hole

Address _____

STATE OF Florida, COUNTY OF Dade, ss.

Dorothy Teichman, Secretary (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dorothy Teichman
6045 Pine Tree Drive

Miami Beach, Fla. 33140

SUBSCRIBED AND SWORN TO before me this 14th day of February, 19 64

NOTARY PUBLIC STATE of FLORIDA at LARGE
MY COMMISSION EXPIRES JAN. 26, 1968

My commission expires BONDED THROUGH FRED W. DIESTELHORST

Ernest Moulton
Notary Public.

SHOLOM DRILLING COMPANY, INCORPORATED
6045 Pine Tree Drive
Miami Beach, Florida 33140

COMPANY: James W. Hershberger
FARM: Miller A
LOCATION: C NE NW Sec 9 T22S R22W, Hodgeman County, Kansas
ROTARY DRILLING CONTRACTOR: Sholom Drilling Company, Inc.

COMMENCED: 1/27/64
COMPLETED: 2/6/64
I. P.: D & A

Elevation: 2280' K. B.
Rotary T. D.: 4700'
Log T. D.: 4701

Casing Record:
8 5/8" @ 282' w/165 sax

LOG

0 - 40 Clay & post rock
40 - 282 Shale, shells, sand streaks
282 - 585 Shale and sand
585 - 825 Red bed
825 - 840 Anhydrite
840 - 920 Red bed and shale
920 - 1105 Sand
1105 - 1410 Red Bed
1410 - 1456 Shale and shells
1456 - 1494 Anhydrite
1494 - 1730 Shale and shells
1730 - 2400 Shale and lime
2400 - 2515 Lime
2515 - 2620 Lime and shale
2620 - 2800 Lime
2800 - 4010 Lime and shale
4010 - 4545 Lime
4545 - 4695 Chert, lime and shale
4695 - 4700 Lime

Lansing 3934
Conglomerate 4532
Reworked Miss. 4550
Welex log at T. D.
No tests


RECEIVED
STATE CORPORATION COMMISSION

FEB 17 1964

CONSERVATION DIVISION
Wichita, Kansas

STATE OF FLORIDA)
COUNTY OF DADE) ss.

I, Joseph Teichman, President of Sholom Drilling Company, Inc., a corporation of the State of Oklahoma, domesticated in the State of Kansas, being first duly sworn under oath, says: That I have knowledge of the facts, statements and matters herein contained of the above described well as filed and that the same are true and correct.

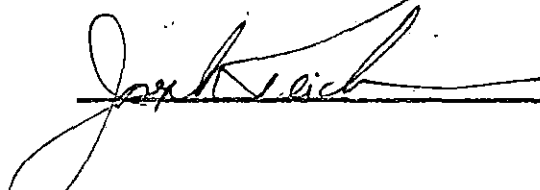

Subscribed and sworn to before me this 14th day of February, 1964



Notary Public

NOTARY PUBLIC STATE of FLORIDA at LARGE
MY COMMISSION EXPIRES JAN. 26, 1968
My Commission expires SPONSORED THROUGH FRED W. DIESTELHORST