


STATE OF KANSAS
STATE CORPORATION COMMISSION
Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

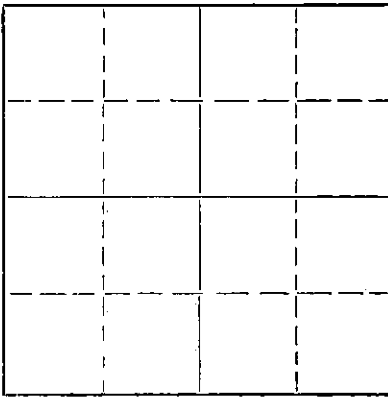

Locate well correctly on above
Section Plat

Finney County, Sec. 27 Twp. 22 Rge. 30 (E) W (W)
Location as "NE/CNW/SW" or footage from lines NE NE SW
Lease Owner Trans Era Petroleum, Inc.
Lease Name Doyle Well No. 1
Office Address Russell, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry
Date well completed 3/13/53 19
Application for plugging filed 3/12/53 19
Application for plugging approved 3/12/53 19
Plugging commenced 3/13/53 19
Plugging completed 3/13/53 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well M. A. Rives
Producing formation Depth to top Bottom Total Depth of Well 4857 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	249'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

PLUGGING RECORD

Finished laying down drill pipe. Filled hole with heavy mud to 240', set first wooden plug, mixed and ran 20 sacks of cement through drill pipe. Filled hole with heavy mud to 35', set wooden plug, mixed 10 sacks of cement and ran on top plug.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor
Address

STATE OF KANSAS, COUNTY OF RUSSELL, ss.
Herbert R. Michaelis (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Herbert R. Michaelis*
Russell, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 18th day of March, 19 53

My commission expires 1-30-57.

Margie Cooper 3-19-53
Notary Public.

PLUGGING
FILE SEC 27 T 22 R 30
BOOK PAGE 84 LINE 33

MAR 19 1953
CONSERVATION DIVISION
Wichita, Kansas

Trans Era Petroleum, Inc.
Doyle #1

NE NE SW Sec. 27-22-30
Finney County, Kansas

Total Depth: 4857'
Comm. 2/14/53
Comp. 3/13/53

Casing

8 5/8" Set @ 249'

Cement

150 sacks of Bulk

Formation	Depth
Sand-broken lime	70
Sand-shells	130
Gravel-sand	200
Blue shale	249
Shale	645
Shale-sand	830
Sand	920
Shale	1291
Red bed-shale	1410
Anhydrite-shale	1460
Shale-sand	1731
Red bed--shale-shells	2130
Red bed-shale	2400
Shale-anhydrite	2460
Shale-lime	2510
Red bed-shale-anhydrite	2565
Shale-anhydrite	2665
Lime-shale	3877
Lime	3891
Lime-shale	4091
Lime	4145
Lime-shale	4188
Lime	4500
Lime-shale	4630
Lime	4673
Lime-shale	4726
Lime	4857'

STATE OF KANSAS)
) ss
RUSSELL COUNTY)

I hereby certify that the above information is true and correct to
the best of my knowledge.

-----Cora Betz-----

Subscribed and sworn to before me this 18th day of March, 1953.

PLUGGING
FILE SEC. 27-22-R 30W
BOOK PAGE 84 LINE 33

-----Maggie Cooper-----
Notary Public

My commission expires: 1-30-57.

NOTARY PUBLIC
MAR 19 1953
FINNEY COUNTY, KANSAS