

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County. Sec. 35 Twp. 22 Rge. (E)12W (W)

Location as "NE/CNW/SW" or footage from lines SE NW NE

Lease Owner Santa-Fe Pipe & Supply, Inc.

Lease Name McCune Well No. 1

Office Address P. O. Box 562, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Oil

Date well completed _____ 19 _____

Application for plugging filed January 16 19 65

Application for plugging approved January 18 19 65


Plugging commenced January 16 19 65

Plugging completed January 22 19 65

Reason for abandonment of well or producing formation Depleted

If a producing well is abandoned, date of last production _____ 19 _____

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

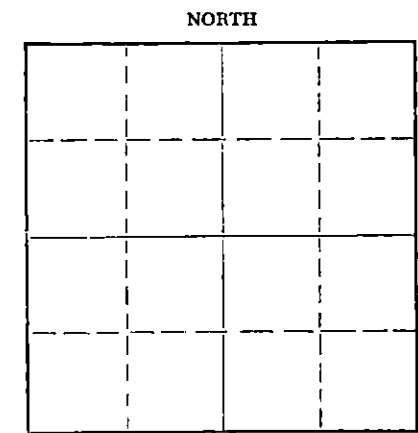

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well A. Elving

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3695' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|--------|--------|------------|
| | | | | 8 5/8" | 241' | None |
| | | | | 4 1/2" | 3694' | 2790' |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

| | | | | |
|-------|---|-------|---|--------------------------|
| 3694' | - | 3680' | - | Sand |
| 3680' | - | 3644' | - | 3 Sacks Cement |
| 3644' | - | 240' | - | Bailed Fluid |
| 240' | - | 225' | - | Rock Bridge |
| 225' | - | 210' | - | 5 Sacks- Dumped W/Bailer |
| 210' | - | 150' | - | 20 Sacks Cement |
| 150' | - | 40' | - | Mud |
| 40' | - | 30' | - | Rock Bridge |
| 30' | - | Base | - | 10 Sacks Cement |

RECEIVED
STATE CORPORATION COMMISSION

FEB 18 1965

CONSERVATION DIVISION
Wichita, Kansas

Name of Plugging Contractor Santa-Fe Pipe & Supply, Inc.
Address P. O. Box 562, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss. George Spencer

(employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) George Spencer
P. O. Box 562, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 16th day of February, 19 65

My commission expires July 31, 1966 Mary M. Guesnier Notary Public.