


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stafford County. Sec. 8 Twp. 22 Rge. 13 E/W
Location as "NE/CNW 1/4 SW 1/4" or footage from lines
S/2 SE SW

Lease Owner Graves Drilling Co., Inc.
Lease Name Schmidt Well No. 1
Office Address 910 Union Center, Wichita, Kansas 67202
Character of Well (Completed as Oil, Gas or Dry Hole)

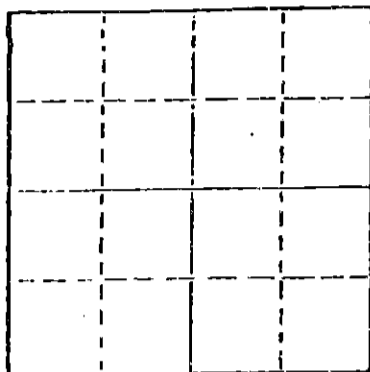

Locate well correctly on above
Section Plot

Dry Hole
Date Well completed October 7 1980
Application for plugging filed October 7 1980
Application for plugging approved October 7 1980
Plugging commenced October 7 1980
Plugging completed October 7 1980
Reason for abandonment of well or producing formation
D&A

If a producing well is abandoned, date of last production 19.

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Duane Rankin
Producing formation Depth to top Bottom Total Depth of Well 3595
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD


FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st Plgu @ 450' w/40 sacks
2nd plug @ 300' w/30 sacks
Plug & Bridge @ 40' w/10 sacks
10 sacks in rat hole
2 sacks in water well

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Mustang Drilling, Inc.



STATE OF KANSAS COUNTY OF BARTON
Milford Martin (employee of owner) or (owner or operator)

of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature)

Box 1423, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 15 day of October, 1980

BEVERLY SHEWBART
Barton County, Kansas
My Appt. Exp. April 17, 1982

Beverly Shewbart
Notary Public.

My commission expires

DRILLERS' WELL LOG

DATE COMMENCED: October 2, 1980
DATE COMPLETED: October 7, 1980

Graves Drilling Co.
SCHMIDT # 1
S/2 SE SW
Sec 8-T22-R13
Stafford County, Kansas

ELEVATION: 1915 KB

0 - 230'	Surface Clay, Sand
230 - 816'	Red Bed, Blue Shale, Shale
816 - 1210'	Shale
1210 - 1690'	Shale w/Lime
1690 - 2805'	Shale, Lime
2805 - 3288'	Lime, Shale
3288 - 3292'	Shale
3292 - 3434'	Lime, Shale
3434 - 3595'	Lime
3595'	RTD

FORMATION TOPS(Log)

Anhydrite	782
Heebner	3288
Brown Lime	3420
Lansing	3434
LTD	3435
RTD	3595

SURFACE PIPE:
Set used 8 5/8", 26# pipe
@ 320' w/275 sacks Common,
2% Gel, 3% cc.

A F F I D A V I T

STATE OF KANSAS)
COUNTY OF BARTON) ss.

I, Milford Martin, of Mustang Drilling, Inc. do state that the above
is true and correct to the best of my knowledge.

RECEIVED
STATE CORPORATION COMMISSION

OCT 10 1980

CONSERVATION DIVISION
Wichita, Kansas

Milford Martin
Milford Martin

Subscribed and sworn to before me this 8th day of October, 1980.

Beverly Shewbart
Notary Public

My Commission Expires

