


DISTRICT CONSERVATION AGENT'S REPORT

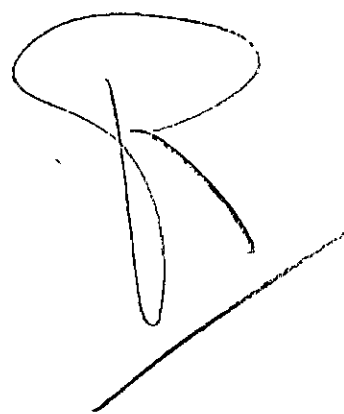

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. _____

LOCATION CS 1/2 - NE - 22W

SEC. 10 TWP. 22 RGE. 12-W

Dry Hole X Abandoned Oil Well _____ Abandoned Gas Well _____

I have today completed supervision of plugging of:

Well No. 4 Lease Stangerberg Spangenberg
Operator Petroleum, Inc Address 700 North Blvd. Wichita - Kans
Field _____ County Stafford
Total Depth 3679 Feet.

(Describe briefly the manner in which the well was plugged)

Surface Pipe 8 3/4 - 180 ft. Circulated with cement.
5 1/2 casing set at 3678 ft. Cemented with 110 sacks cement.
Plugged back to 3330 ft with Lane Wells Plug &
Shot - Cemented 5 sacks cement at 3330 ft - Shot off
& pulled the 5 1/2 casing - mud to 180 ft - Set
Rock Bridge & 15 sacks of cement at 180 ft
mud to top. Plug & 10 sacks of cement
at the surface

RECEIVED
STATE CORPORATION COMMISSION

FEB 10 1951

CONSERVATION DIVISION
Wichita, Kansas

2-10-51

C. N. Stough
District Conservation Agent

Date 2-3-51

PLUGGING
FILE SEC 10 TWP 22 RGE 12
BOOK PAGE 61 LINE 4