


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission

WELL PLUGGING RECORD

P. O. Box 17027
Wichita, Kansas 67217
NORTH

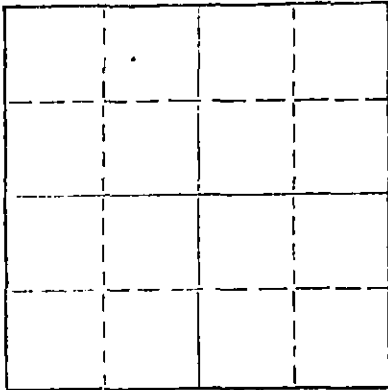

Locate well correctly on above
Section Plat

Stafford County, Sec. 12 Twp. 22S Rge. 13W (E) (W)
Location as "NE/CNW/SE/SW" or footage from lines. C NW/4
Lease Owner. Murfin Drilling Company
Lease Name. Curtis #1 Well No. 1
Office Address. 617 Union Center, Wichita, Kansas 67212
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed June 10, 1974 19
Application for plugging filed June 8, 1974 19
Application for plugging approved June 8, 1974 19
Plugging commenced 11:00 PM, June 9, 1974 19
Plugging completed 1:00 AM, June 10, 1974 19
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well G. R. Biberstein
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3795' Feet
Show depth and thickness of all water, oil and gas formations.


OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8	295'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud.
40 sacks cement at 500'.
25 sacks cement at 275'.
Solid Bridge at 40'.

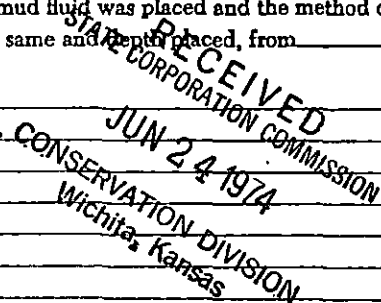

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Sterling Drilling Company
Address P. O. Box 129, Sterling, Kansas 67579

STATE OF KANSAS COUNTY OF RICE, ss.
F. A. Wuellner, (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God. STERLING DRILLING COMPANY

(Signature) [Signature]
F. A. Wuellner, Secretary
P. O. Box 129, Sterling, Kansas 67579
(Address)

Subscribed and sworn to before me this 12th day of June, 1974.



CHARLES HALL—NOTARY PUBLIC
My Commission Expires Jan. 6, 1978

[Signature]
Charles M. Hall, Notary Public.

STERLING DRILLING COMPANY
 P. O. Box 129
 Sterling, Kansas 67579

WELL LOG ----- CURTIS #1
 Located: C NW/4, Section 12-22S-13W, Stafford County, Kansas

OWNER: Murfin Drilling Company
 ROTARY DRILLING CONTRACTOR: Sterling Drilling Company

COMMENCED: May 30, 1974
 COMPLETED: June 10, 1974

TOTAL DEPTH: 3795'

<u>LOG</u>		<u>CASING RECORD</u>
0 - 190	Sand and Clay	Ran 7 joints 8 5/8" OD casing, 282.98' cemented at 295' KB with 280 sacks common cement, 2% gel, 3% cc. Plug down at 6:30 PM, 5-30-74.
190 - 297	Sand and Red Bed	
297 - 725	Shale and Sand	
725 - 740	Anhydrite and Shale Stgs.	
740 - 750	Anhydrite	
750 - 1690	Shale and Shells	
1690 - 3208	Lime and Shale	
3208 - 3213	Shale	
3213 - 3330	Lime and Shale	
3330 - 3750	Lime	
3750 - 3795	Arbuckle	Plugged.

RECEIVED
 STATE CORPORATION COMMISSION
 JUN 24 1974
 CONSERVATION DIVISION
 Wichita, Kansas