

STATE OF KANSAS
STATE CORPORATION COMMISSION


Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

Stafford County. Sec 28 Twp. 23S Rge. 12 (E) W (W)

Location as "NE/CNW/SW" or footage from lines S 1/2 NW NE SE NE
Lease Owner Robert L. Austin
Lease Name Meyer B Well No. #1
Office Address Box 159, Stafford, Ks. 67578
Character of Well (completed as Oil, Gas or Dry Hole) SWD
Date well completed December 17, 1970
Application for plugging filed May 6, 1985
Application for plugging approved May 13, 1985
Plugging commenced June 3, 1985
Plugging completed June 4, 1985
Reason for abandonment of well or producing formation Junk in Hole

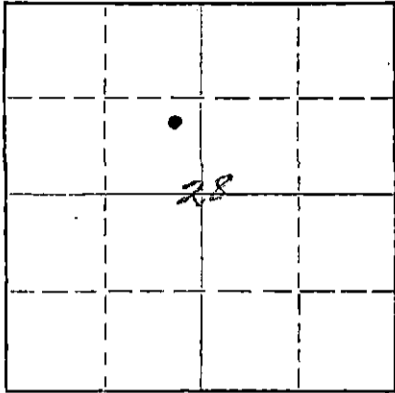

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. H. Metz
~~XXXXXX~~ formation Arbuckle Depth to top 3835 Bottom 3960 Total Depth of Well 3960 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	set @ 226'	cemented w/200 s
				5 1/2"	set @ 3835'	with 350 sks.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Ran 1863' of tubing in hole, tagged iron in hole, picked up 3' pumped 50 sks. cement with 3% cc and 1 bag of flocele, pulled tubing, waited 2 1/2 hrs. Ran tubing back and tagged hard cement @ 1790', a 350' column of cement went by iron in hole, pulled tubing to 1060' pumped 100 sks; waited 2 1/2 hrs; tagged cement @ 1120' pulled tubing to 750' spotted 50 sks. cement and 2 sks. hulls, pulled 10 jts. spotted 50 sks of cement, 1 sk. hulls laid down tubing shut down for night.

Ran tubing back tagged cement @ 550' pulled tubing to 410' mixed and circulated 100 sks. cement, circulated water but no cement waited 3 hrs. ran tubing back to 250' spotted 50 sks. circulating cement immediately and circulated cement until we had 50 sks. displaced. Laid down tubing pumped 50 sks. between 8 5/8" and 5 1/2" mixed 5 sks. to fill 5 1/2" casing within 2' of top. Both 5 1/2" and 8 5/8" were standing full of cement. Total cement used approximately 455 sks. of 50-50 pos. STATE CORPORATION COMMISSION

JUN 07 1985

CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Halliburton
Address Great Bend, Kansas 67530 6-7-85

STATE OF KANSAS, COUNTY OF STAFFORD, ss.
Robert L. Austin (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) [Signature]

Box 159, Stafford, Kansas 67578
(Address)

SUBSCRIBED AND SWORN to before me this 6th day of June, 1985

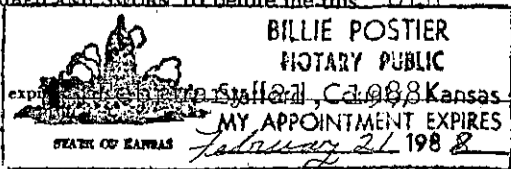

Billie Postier
Notary Public.

My commission expires February 21, 1988