


STATE OF KANSAS  
STATE CORPORATION COMMISSION

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 12 Twp. 22 Rge. 12 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE NE SW  
Lease Owner H. C. Bennett  
Lease Name Voight  
Office Address 1212 Union National Bldg., Wichita, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole) oil well  
Date well completed 12-23-56  
Application for plugging filed 10-22-65  
Application for plugging approved 10-24-65  
Plugging commenced 11-4-65  
Plugging completed 11-6-65  
Reason for abandonment of well or producing formation depleted

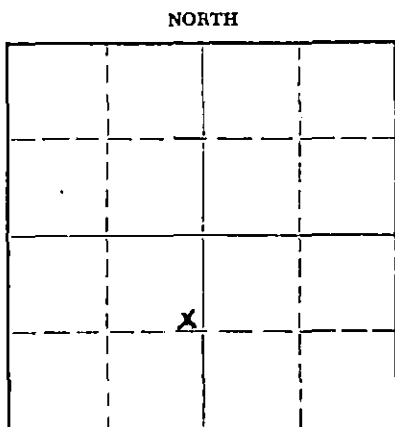

Locate well correctly on above Section Flat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Archie Elving  
Producing formation Depth to top Bottom Total Depth of Well 3618 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FRDM	TD	SIZE	PUT IN	PULLED OUT
				8 5/8	272	none
				5 1/2	3610	3010.98

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Fill hole with chat from 3618' to 3600' and dump 5 sacks cement.  
Set 10' rock bridge from 160' to 150' and mix and dump 4 sacks cement - let cement set overnight. Bail hole down to bridge and dump 25 sacks cement. Mud hole to 40', rock bridge to 30' and dump 10 sacks cement.

11-15-65  
RECEIVED  
STATE CORPORATION COMMISSION

NOV 15 1965

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor Flint Engineering & Construction Company  
Address Box 950, El Dorado, Kansas

STATE OF KANSAS, COUNTY OF BUTLER, ss.  
(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Laura Bawle  
El Dorado, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 11th day of November, 1965

Ronald R. Hanson  
Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY  
508 East Murdock, Wichita, Kansas

COPY


15-185-13100-0000

Company- NORTHERN PUMP CO.  
Farm- Voight No. 6

SEC. 12 T. 22 R. 12W  
SE NE SW

Total Depth. 3618'  
Comm. 11-27-56 Comp. 12-23-56  
Shot or Treated.  
Contractor. Strata Drlg., Inc.  
Issued. 4-6-57

County Stafford  
KANSAS



Elevation. 1818' DE

Production. 61 bbls. oil  
in 24 hrs. - 45% wtr.

Figures indicate Bottom of Formations.

CASING:  
8 5/8" 272'  
5 1/2" 3610'

*75 Jacks*

sand-shale	115
shale	265
shale-shells	985
Anhydrite-shale	1045
shale-shells	1470
lime-shale	3390
lime	3527
lime-shale	3605
Rotary T.D.	3610
Cable Tool lime	3618

TOPS:

Heebner	3086
Brown lime	3216
Lansing	3241
Viola	3504
Simpson	3548
Arbuckle	3607

Pump 61 bbls. oil in 24 hrs.-  
45% wtr.

RECEIVED  
STATE CORPORATION COMMISSION

NOV 15 1965

CONSERVATION DIVISION  
Wichita, Kansas