

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Stafford County, Sec. 6 Twp. 22 Rge. 12W
Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines
N/2 SW SE

Lease Owner Energy Reserves Group, Inc.
Lease Name Cook Well No. 1

Office Address 925 Patton Road, Gt. Bend, Kansas 67530
Character of Well (Completed as Oil, Gas or Dry Hole)


Dry Hole

Date Well completed 1/10/81 19
Application for plugging filed 1/10/81 19
Application for plugging approved 1/10/81 19
Plugging commenced 1/10/81 19
Plugging completed 1/10/81 10:45 p.m. 19
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Wm. T. Owen
Producing formation Depth to top Bottom Total Depth of Well
Show depth and thickness of all water, oil and gas formations. RTD 3750'

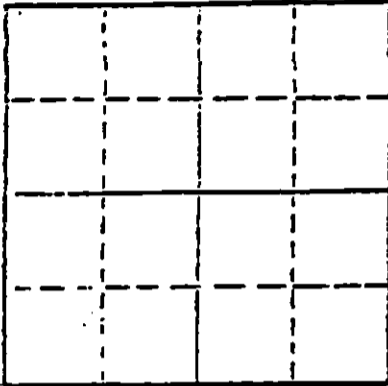

Locate well correctly on above Section Plat

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
	Surface	0	703'	8-5/8"	yes	no

Describe in detail the manner in which the well was plugged, indicating where the mud plug was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

1st plug @ 690' with 40 sacks
2nd plug @ 300' with 30 sacks
Bridge @ 40' with 10 sacks
10 sacks in rathole
Job complete @ 10:45 p.m. 1/10/81

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Slawson Drilling Company, Inc.


STATE OF Kansas COUNTY OF Sedgwick, ss.
James C. Remsberg, Slawson Drilling Co., Inc. (employee of owner) or (owner or operator of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well is filed and that the same are true and correct. So help me God.

(Signature) James C. Remsberg
James C. Remsberg
200 Douglas Building, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 29th day of January, 1981

Mary Lou Taylor
Mary Lou Taylor Notary Public.

My commission expires January 17, 1985



2-5-81
FEB - 5 1981

DRILLERS LOG

OPERATOR: Energy Reserves Group, Inc.
 925 Patton Road
 Great Bend, Kansas 67530

WELL NAME: Cook #1
 N/2 SW SE Sec.6-22S-12W
 Stafford County, Kansas

CONTRACTOR: Slawson Drilling Company, Inc.
 200 Douglas Building
 Wichita, Kansas 67202

COMMENCED: 1/2/81

COMPLETED: 1/10/81

RTD: 3750'

SURFACE CASING: 8-5/8" set at 703' with 450 sx cement

0' to 682' Shale & Sand
 682' to 706' Anhydrite
 706' to 1020' Anhydrite, Shale & Shells
 1020' to 1630' Shale & Lime
 1630' to 1811' Sand & Shale
 1811' to 2140' Shale & Lime
 2140' to 2685' Lime & Shale
 2685' to 3133' Shale & Lime
 3133' to 3330' Lime & Shale
 3330' to 3414' Lime
 3414' to 3575' Lime & Shale
 3575' to 3645' Viola-Cong.
 3645' to 3750' Arbuckle (Arbuckle starts 3674')
 RTD 3750'

State of Kansas

County of Sedgwick

I, James C. Remsberg, of the Slawson Drilling Company, Inc. hereby state the above is an accurate copy of the Cook #1 log for Energy Reserves Group, Inc.

James C. Remsberg
 James C. Remsberg

Subscribed and sworn to me this 29th day of January, 1981

Mary Lou Taylor
 Mary Lou Taylor, Notary

My commission expires January 17, 1985

STATE OF KANSAS CONSERVATION DIVISION

FEB - 5 1981

CONSERVATION DIVISION
Wichita, Kansas

