


15.185-20521-0000

STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Stafford County, Sec 10 Twp 22s Rgs 12 (E) W (W)
100' So. & 30' West of C W/2 E/2 NE/4

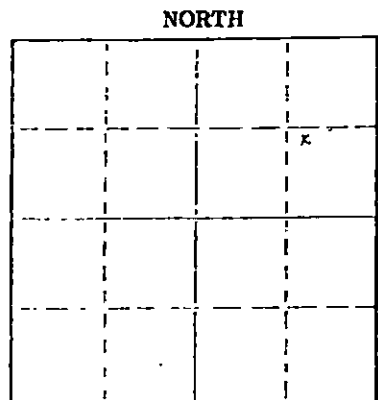

Location as "NE/CNWSW2" or footage from line
Lease Owner National Development Co.
Lease Name AHNEET Well No. 2
Office Address 1300 Union National Bldg., Wichita, Ks. 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed August 22 19 74
Application for plugging filed August 22 19 74
Application for plugging approved August 22 19 74
Plugging commenced August 22 19 74
Plugging completed August 22 19 74
Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well G. R. Bieberstein
Producing formation Depth to top Bottom Total Depth of Well 3665'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

| FORMATION | CONTENT | FROM | TO | SIZE | PUT IN | PULLED OUT |
|-----------|---------|------|----|------|--------|------------|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

RECEIVED
STATE CORPORATION COMMISSION
AUG 28 1974
CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole full of heavy mud to 500'
Set plug with 40 sacks cement thru drill pipe.
Come up hole to 225' - set plug with 25 sacks cement thru drill pipe.
Top Plug set at 40' with 1/2 sk. hulls & 15 sacks cement.
2 sacks cement in rat hole.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Duke Drilling Co.
Address Box 823 Great Bend, Ks. 67530

STATE OF Kansas COUNTY OF Barton ss.

Leonard Williamson (employee of owner) or (owner/operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leonard Williamson
Box 823 - Great Bend, Ks. 67530
(Address)

Subscribed and sworn to before me this 27 day of August 19 74.

My commission expires April 11, 1978
Notary Public.

Corrected Well Log: Changes spot location
 from C100' So. & 30' West of C W/2 W/2 NE
 to: 100' So. & 30' West of C W/2 E/2 NE

DRILLERS' WELL LOG

DATE COMMENCED: August 14, 1974
 DATE COMPLETED: August 22, 1974

National Development Co.
 WELL #2
 100' South end 30' West
 of C W/2 E/2 NE/4 of
 Section 10-T22S-R12W
 Stafford County, Kansas

ELEVATION: 1855 K.B.

0 - 135' Sand & Shale Streaks
 135 - 160' Shale - Sand Streaks
 160 - 636' Red Bed
 636 - 657' Anhydrite
 657 - 1513' Shale - Shells
 1513 - 3146' Lime & Shale
 3146 - 3150' Shale
 3150 - 3166' Lime & Shale
 3166 - 3177' Lime
 3177 - 3277' Shale
 3277 - 3290' B. Lime
 3290 - 3550' Lime
 3550 - 3558' Lime & Shale
 3558 - 3615' Chert
 3615 - 3650' Shale
 3650 - 3665' Dolomite
 3665' RTD

FORMATION DATA

| | |
|-------------|------|
| Anhydrite | 636 |
| Heebnor | 3146 |
| Toronto | 3166 |
| Douglas | 3177 |
| Brown Lime | 3277 |
| Kansas City | 3290 |
| Base K.C. | 3550 |
| Viola | 3558 |
| Simpson | 3615 |
| Arbuckle | 3650 |
| RTD | 3665 |

RECEIVED
 STATE CORPORATION COMMISSION
 AUG 28 1974
 CONSERVATION DIVISION
 Wichita, Kansas

Surface Pipe: Set used
 8-5/8", 24# pipe at 255'
 with 225 sacks common cement,
 with 2% Gel & 3% cc.

AFFIDAVIT

STATE OF KANSAS
 COUNTY OF BARTON) ss.

Leonard Williamson, of lawful age does swear and state that the facts
 and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson

Subscribed and sworn to before me this 27 day of August 1974.

My Comm. Expires
April 11, 1978

Harathy M. Hague
 Notary Public