

TO:
STATE CORPORATION COMMISSION
CONSERVATION DIVISION - PLUGGING
266 N. Main St., Ste. 220
Wichita, KS 67202-1513

API Well Number: 15-113-19259-00-00
Spot: SENESE Sec/Twnshp/Rge: 4-19S-2W
1650 feet from S Section Line, 330 feet from E Section Line
Lease Name: WW JOHNSON Well #: 2
County: MCPHERSON Total Vertical Depth: 2975 feet

Operator License No.: 35109
Op Name: RBOC, LLC
Address: 2804 CEDAR SPRINGS LN
WAMEGO, KS 66547

String	Size	Depth (ft)	Pulled (ft)	Comments
PROD	4.5	2955		40 SX
SURF	8.625	160		100 SX

Well Type: OIL UIC Docket No: _____ Date/Time to Plug: 03/02/2017 12:00 AM
Plug Co. License No.: 30280 Plug Co. Name: SUNFLOWER WELL SERVICE, INC.
Proposal Rcvd. from: BUD DAVIS Company: RBOC, LLC Phone: (620) 654-8342

Proposed Plugging Method: SAND OFF TO 2905 FT AND CAP WITH 4 SX. PERF @ 250 FT & CIRCULATE TO SURFACE - NO KNOWN PERFS.

Plugging Proposal Received By: _____ WitnessType: COMPLETE (100%)
Date/Time Plugging Completed: 03/02/2017 12:00 AM KCC Agent: JERRY SPARLING

Actual Plugging Report:

SANDED OFF @ 2850'. CAPPED WITH 4 SX. TIED ON TO 5.5" PULLED (NO STRETCH) RAN 10 JOINTS 310' AND CIRCULATED TO SURFACE WITH 23 SX 60/40 CEMENT W/4% GEL. RAN 1" HIGH DRILL DOWN BACKSIDE TO 250' CIRCULATED 17 SX 60/40 CEMENT WITH 4% GEL TO SURFACE.

Perfs:


Top	Bot	Thru	Comments
2875	2905		CSG
0	250		CSG

Remarks: CONSOLIDATED OTTOWA CREW

Plugged through: CSG

District: 02

Signed

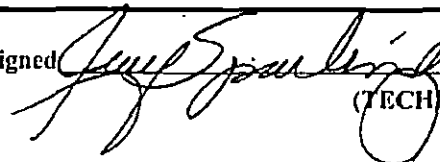

(TECHNICIAN)

Form CP-2/3

INVOICED

APR - 7 2017