


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division,
State Corporation Commission,
800 Bitting Building,
Wichita, Kansas.

WELL PLUGGING RECORD

OR 15-009-15124-0000
FORMATION PLUGGING RECORD Strike out upper line when reporting plugging of formations.

NORTH

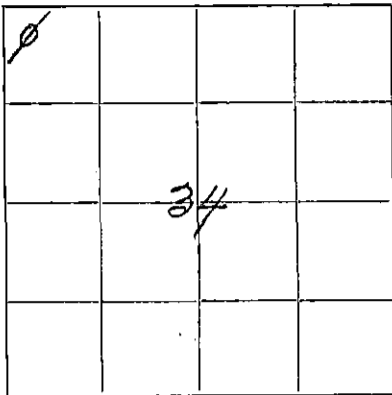

Locate well correctly on above
640 A. Plat

Barton ^{MW} County. Sec. 34 Twp. 16 Rge. (E) 11 (W)
Lease Name... H. Frees # 1 **WELL NO.**
Lease Owner... C.E. Ash et al
Office Address... 309 Ellis Sing. Bldg., Wichita, Kans
Character of Well (Oil, Gas or Dry)... Dry... Total Depth of Well 3444 Feet
Date, well, completed Jan. 21, 1938
Application for plugging and log of well filed Jan. 20, 1938 193
Application for plugging approved Jan. 20, 1938 193
Plugging Commenced Jan. 20, 1938 193
Plugging Completed Jan. 21, 1938 193
Reason for abandonment of well or producing formation dry

If a producing well is abandoned, date of last production 193
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Officer who supervised plugging of this well C.T. Alexander
Producing formation Silicious lime Depth to top 3398 Bottom 3444
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS


CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Sand	HFW	305		15 1/2	411	411
Lime	1 BW	1795	1800	12 1/2	767	767
Lime	1 BW	2790	2800	10	2120	2120
Lime	Smell oil	2875		8 5/8	2780	2780
Lime	" "	3120		7"	3338	3338
Lime	2 BW	3220	3230	85'		
Lime	Smell oil	3308	3311	5 3/16	85'	85
Sil Lime	show oil	3409				

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from... feet to ... feet for each plug set.
2 BW per hr. HFW Sulphur 3429 3431
More " 3444

Filled up to 2500' with mud from pond, put in by pump.
Bridge of rock at 435 feet, drilled on until solid, then cemented at 435 feet with 15 sacks cement.
Filled on up to cellar with mud from pond and cemented cap with 10 sacks cement,

Rec'd 1-24-38



(If additional description is necessary use BACK of this sheet)

Does the above conform strictly to the Conservation Division regulations? yes
Was exception made? If so describe
Correspondence regarding this well should be addressed to C.E. Ash,
Address 309 Ellis Singleton Bldg.,
Wichita, Kansas.

STATE OF Kansas, COUNTY OF Sedgwick, ss.
C.E. Ash (owner) (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *C.E. Ash*
309 Ellis Singleton Bldg.,
Wichita, Kansas.

SUBSCRIBED AND SWORN to before me this 22 day of Jan., 1938
My commission expires Apr. 18, 1939
[Signature]
Notary Public.

