


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Blitting Building
Wichita, Kansas

WELL PLUGGING RECORD

15-0905546-0000

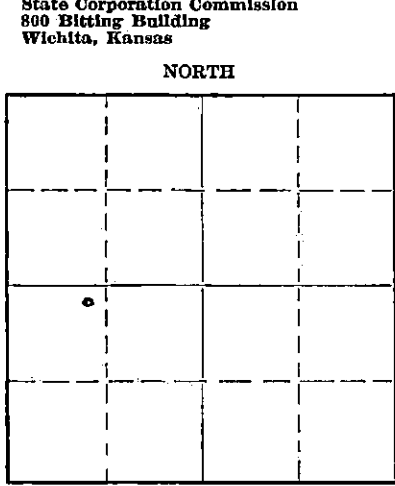

Locate well correctly on above
Section Flat

Barton County, Sec. 35 Twp. 16S Rge. 11 (E) 11 (W)
Location as "NE/CNW/4SW/4" or footage from lines. NE NW SW
Lease Owner The Eldorado Refining Company
Lease Name Frees Well No. "B" No. 2
Office Address 407 Brown Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed March 27, 19 49
Application for plugging filed March 27, 19 49
Application for plugging approved March 27, 19 49
Plugging commenced March 27, 19 49
Plugging completed March 27, 19 49
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well C. D. Stough
Producing formation Depth to top Bottom Total Depth of Well 3399 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8-5/8"	254'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from.....feet tofeet for each plug set.

Set bottom plug at 250 feet. Cemented through drill pipe with 15 sacks cement. Top plug at 30 feet. Cemented with 10 sacks cement.

4-1-49

(If additional description is necessary, use BACK of this sheet)


Correspondence regarding this well should be addressed to The Eldorado Refining Company
Address 407 Brown Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Rice, ss.
Rollin Mead (employee of owner) or (owner or operator) of the above-described well,
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Rollin Mead*
Sterling, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 29th day of March, 19 49.

My commission expires September 17, 1949. *F. J. ...* Notary Public.



15-009-055460000

THE EL DORADO REFINING COMPANY

EL DORADO, KANSAS

WELL LOG ----- Frees "B" No. 2

Location - NE/c NW/4 SW/4 of Section 35-16S-11W, Barton County, Kansas

Owner - The ElDorado Refining Company, ElDorado, Kansas

Contractor - Sterling Drilling Company, Sterling, Kansas

Commenced - 3-16-49

Completed - 3-27-49

Total Depth - 3399'

LOG

0- 75	Surface clay and sand
75- 750	Shale and shells
750- 780	Anhydrite
780-1260	Shale and shells
1260-1490	Salt, shale and shells
1490-1645	Shale and lime
1645-2040	Lime
2040-2715	Shale and lime
2715-3010	Lime
3010-3090	Lime and shale
3090-3355	Lime
3355-3372	Shale and lime
3372-3399	Conglomerate

CASING RECORD

254 feet 8-5/8" surface Pipe
Cemented with 200 sacks cement.

PRODUCTION

None. Dry and Abandoned.

TOPS

Heebner	2968
Brown ls.	3079
Lansing	3094
Congl.	3368
Rew. Arb.	3395

PLUGGING
 FILE SEC 35T-16R-11W
 BOOK PAGE 88 LINE 45

MAR 30 1949
 STATE CORPORATION
 COMMISSION
 KANSAS

Location - NE/c NW/4 SW/4 of Section 35-16S-11W, Barton County, Kansas

Owner - The Eldorado Refining Company, Eldorado, Kansas
 Contractor - Sterling Drilling Company, Sterling, Kansas

Commenced - 3-16-49
 Completed - 3-27-49

Total Depth - 3399'

LOG

0- 75 Surface Clay and Sand
 75- 750 Shale and Shells
 750- 780 Anhydrite
 780-1260 Shale and Shells
 1260-1490 Salt, Shale and Shells
 1490-1645 Shale and Lime
 1645-2040 Lime
 2040-2715 Shale and Lime
 2715-3010 Lime
 3010-3090 Lime and Shale
 3090-3355 Lime
 3355-3372 Shale and Lime
 3372-3399 Conglomerate

CASING RECORD

254 Feet 8-5/8" Surface Pipe
 Cemented with 200 Sacks Cement.

PRODUCTION

None. Dry and Abandoned.

PLUGGING
 FILE SEC 35 T 16 R 11W
 BOOK PAGE 89 LINE 45

APR - 1 1949
 ST. CORPORATION
 COMMISSION
 KANSAS