

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 North Market, Insurance Bldg.
Wichita, Kansas

Barton County. Sec. 35 Twp. 16 Rge. 11W (E) (W)

Location as "NE/CNW/SE/SW" or footage from lines SE/SE/SW

Lease Owner Wilkinson Drilling Company

Lease Name Frees Well No. #1

Office Address East 10th, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed Yes 19__

Application for plugging approved Yes 19__


Plugging commenced 4-28 19 59

Plugging completed 4-30 19 59

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

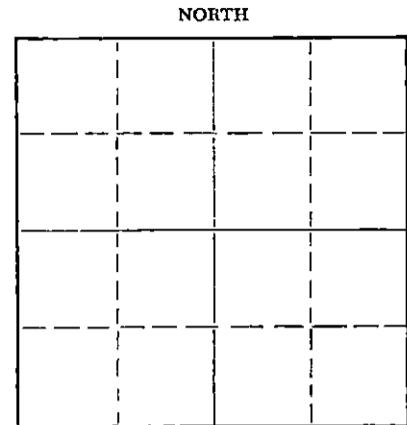

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Mr. Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3417' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	Surface	
				5 1/2"		2,698'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Measured into T.D. 3417'.
Plugging Started 4-28-59. Finished 4-30-59.
Plugged off bottom and sanded back to 3400'. Dumped 5 sacks of cement. Worked and shot pipe. Shot 5 1/2" casing at 2,698'. Pulled pipe out of hole and plugged well as follows: Mudded to 280'. Dumped 25 sacks of cement. Mudded to 40'. Set rock bridge and dumped 10 sacks of cement for cap on well. Well completed.

RECEIVED
STATE CORPORATION COMMISSION
MAY 12 1959
CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor J.O. Forbes d/b/a Forbes Casing Pulling Co.

Address Box 221, Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.
J.O. Forbes (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) J.O. Forbes

Box 221, Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of May, 1959

Betty S. Edman
Notary Public.

My commission expires December 8, 1960.

PLUGGING
FILE SEC 35 T. 16. R. 11W.
BOOK PAGE 37 LINE 36

MAY 8 1959

15-009-01163-0000

WILKINSON DRILLING, INC.
1121 Union National Building
Wichita 2, Kansas

May 28, 1958

RECEIVED
STATE CORPORATION COMMISSION
MAY 12 1958
CORP. DIVISION
WICHITA, KANSAS

FREES NO. 1

Company	- WILKINSON DRILLING, INC.	Location	- SE SE SW, Sec. 35-16-11W
Contractor	- Company Tools		Barton County, Kansas
Commenced	- April 8, 1958	Elevation	- 1944' KB
Completed	- April 17, 1958	Casing	- 14 fts. 8 5/8"
Total Depth	- 3417 feet		- 105 fts. 5 1/2"

FIGURES INDICATE BOTTOMS OF FORMATIONS

Depth	Formation
0 - 85	Surface Clay and Rock
85 - 280	Shale and Sand Streaks
280 - 470	Shale, Shells, and Red Beds
470 - 758	Shale and Clay
758 - 797	ANHYDRITE
797 - 1715	Shale and Shells
1715 - 1920	Shale and Lime
1920 - 2015	Lime
2015 - 2195	Lime and Shale
2195 - 2750	Shale and Lime
2750 - 3100	Lime and Shale
3100 - 3387	Lime with Shale Streaks
3387 - 3393	Various Colored Shale and Chert
3393 - 3400	Dolomitic Chert
3400 - 3417	Dolomite

We hereby certify the above and foregoing to be a true and correct copy of the Log on the Frees No. 1, located in the SE SE SW, Section 35 - 16 - 11W, Barton County, Kansas.

WILKINSON DRILLING, INC.

Walter M. Wilkinson

Subscribed and sworn to before me this twenty-eighth day of May, nineteen hundred and fifty-eight.

Caroline K. Moore

My Commission expires January 2, 1961.

PLUGGING
FILE SEC 35 T 16 R 11W
BOOK PAGE 37 LINE 36

WILKINSON DRILLING, INC.

1121 Union National Building

Wichita 2, Kansas

1500901163-0000

May 28, 1958

FREES NO. 1

Company	- WILKINSON DRILLING, INC.	Location	- SE SE SW, Sec. 35-16-11W
Contractor	- Company Tools		Barton County, Kansas
Commenced	- April 8, 1958	Elevation	- 1944' KB
Completed	- April 17, 1958	Casing	- 14 jts. 8 5/8"
Total Depth	- 3417 feet		- 105 jts. 5 1/2"

FIGURES INDICATE BOTTOMS OF FORMATIONS

Depth	Formation
0 - 85	Surface Clay and Rock
85 - 280	Shale and Sand Streaks
280 - 470	Shale, Shells, and Red Beds
470 - 758	Shale and Clay
758 - 797	ANHYDRITE
797 - 1715	Shale and Shells
1715 - 1920	Shale and Lime
1920 - 2015	Lime
2015 - 2195	Lime and Shale
2195 - 2750	Shale and Lime
2750 - 3100	Lime and Shale
3100 - 3387	Lime with Shale Streaks
3387 - 3393	Various Colored Shale and Chert
3393 - 3400	Dolomitic Chert
3400 - 3417	Dolomite

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1958
CONSERVATION DIVISION
WICHITA, KANSAS

We hereby certify the above and foregoing to be a true and correct copy of the Log on the Frees No. 1, located in the SE SE SW, Section 35 - 16 - 11W, Barton County, Kansas.

PLUGGING
FILE SEC. 35 T. 16 R. 11W
BOOK PAGE 33 LINE 19

WILKINSON DRILLING, INC.

Walter M. Verduisen

Subscribed and sworn to before me this twenty-eighth day of May, nineteen hundred and fifty-eight.

Caroline K. Moore

My Commission expires January 2, 1961.