


15-009-15142000

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

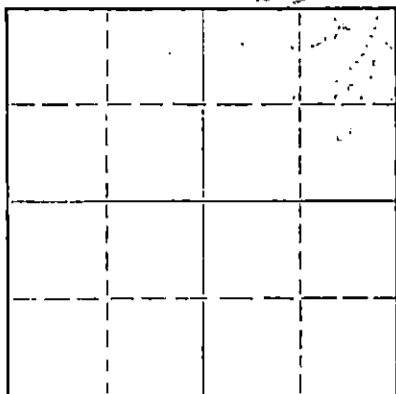

Locate well correctly on above
Section Flat

Barton County, Sec. 34 Twp. 16 Rge. 11 (E) (W)
Location as "NE/CNW/SW" or footage from lines NW SE SW
Lease Owner Hinkle Oil Company
Lease Name Kroutwurst #16 Well No.
Office Address Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole)
Date well completed 19
Application for plugging filed 19
Application for plugging approved 19
Plugging commenced 6/24/70 19
Plugging completed 6/26/70 19
Reason for abandonment of well or producing formation depleted
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Truan
Producing formation Depth to top Bottom Total Depth of Well 3350 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	110	none
				5 1/2"	3350	1700'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Ran sand to 3325', ran 5 sacks of cement. Shot pipe at 1998', 1815', 1700', worked pipe loose and pulled 54 joints. Pumped 3 sacks hulls, 15 sacks mud and 90 sacks 9f cement.

PLUGGING COMPLETE.


(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor KNIGHT CASING PULLING CO., INC.
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.
NOEL J. KNIGHT (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel Knight
CHASE, KANSAS
(Address)

Subscribed and sworn to before me this 29 day of June, 19 70



My commission expires 2/15/71

Margaret Melcher
Notary Public.

Casing record.

8 5/8 110
5 1/2 3350

Kroutwurst No. 16, NW SE SW 34-16-11 Barton Co. Kansas.
Hinkle Oil Company,
Contractor: J. B. Hinkle.
Commenced 9-2-51 Completed 9-12-51
Elevation ~~302~~ 1916

15-009-15142-0000

0	15	Surface soil and rock
15	32	Rock and shale
32	560	Shale and shells
560	732	Red Bed and shale
732	760	Andydrite
760	1005	Red bed and shale
1005	1590	Shale and shells
1590	1746	Broken lime shale and shells
1746	2350	Lime and shale
2350	2515	Shale and shells
2515	2770	Lime and shale
2770	2895	Lime
2895	3143	Lime and shale
3143	3173	Shale
3173	3250	Lime
3250	3349	Lime and shale
3349	3350	Arbuckle Lime
T.D.	3350	

Tops: Brown Lime	3069	(-1153)
Lansing	3085	(-1169)
Arbuckle	3350	(-1434)

RECEIVED
STATE CORPORATION COMMISSION
MAY 28 1970
CONSERVATION DIVISION
Wichita, Kansas

State of Kansas)
County of Sedgwick) ss

I hereby certify that the above is a true and correct log as compiled from the daily drilling reports kept on said well.

And further affiant saith not.

J. B. Hinkle

Subscribed to and sworn to before me this 3rd day of October, 1951.

Murcel A. Lipton

N.P.

My commission expires 1-17-54