


STATE OF KANSAS  
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to  
Conservation Division  
State Corporation Comm.  
245 North Water  
Wichita, KS 67202

Stafford County, Sec. 9 Twp. 22 Rge. 12W  
Location as "NE/CNW/SW" or footage from lines  
S/2/S/2/NW  
Lease Owner Bill Witcraft  
Lease Name Teichmann Well No. #1  
Office Address Box 811 - Great Bend, Ks. 67530  
Character of Well (Completed as Oil, Gas or Dry Hole)

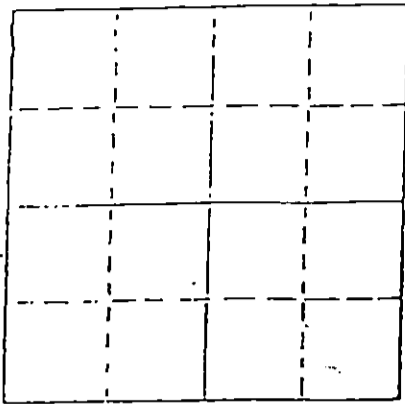

Locate well correctly on above  
Section Plat

Oil  
Date Well completed  
Application for plugging filed  
Application for plugging approved  
Plugging commenced December 09, 1981  
Plugging completed December 16, 1981  
Reason for abandonment of well or producing formation  
Depleted

If a producing well is abandoned, date of last production

Was permission obtained from the Conservation Division of  
its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well J. H. Metz  
Producing formation Depth to top Bottom Total Depth of Well  
Show depth and thickness of all water, oil and gas formations. 3689'

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	284'	NONE
				5 1/2"	3685'	2319.88'

Describe in detail the manner in which the well was plugged, indicating where the mud flow  
was placed and the method or methods used in introducing it into the hold. If cement or other  
plugs were used, state the character of same and depth placed, from feet to  
feet for each plug set.

Dumped sand to 3400' and five (5) sacks cement.  
Shot pipe @ 2600', 2400' and 2300'.  
Pulled fifty-eight (58) joints of 5 1/2" casing.  
Squeezed well with three (3) sacks hulls, twenty-(20) sacks gel,  
one (1) sack hulls, one hundred forty (140) sacks 50/50 pozmix  
cement with 4% added gel and 3% calcium chloride.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rockhold Engineering, Inc.

STATE OF KANSAS COUNTY OF BARTON, ss.  
James W. Rockhold (employee of owner) or (owner or operator)  
of the above-described well, being first duly sworn on oath, says: That I have knowledge of  
the facts, statements, and matters herein contained and the log of the above-described well  
is filed and that the same are true and correct. So help me God.

(Signature) James W. Rockhold  
James W. Rockhold - Box 698 - Great Bend, Ks. 67530  
(Address)

SUBSCRIBED AND SWORN TO before me this 8th day of Jan, 1982

commission expires



RECEIVED  
STATE CORPORATION COMMISSION  
Notary Public.

JAN 11 1982

CONSERVATION DIVISION  
Wichita, Kansas

1-11-82