

STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bittling Building
Wichita, Kansas

OR

FORMATION PLUGGING RECORD

Strike out upper line
when reporting plug-
ging off formations.

Stafford County, Sec. 15 Twp. 22 Rge. (E) 12 (W)

Location as "NE1/4NW1/4SW1/4" or footage from lines C-NW NW NE

Lease Owner Sunray Oil Corporation

Lease Name Messerly Well No. 1

Office Address Box 195, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 1-11 19 51

Application for plugging filed 1-15 19 51

Application for plugging approved 1-17 19 51


Plugging commenced 2-4 19 51

Plugging completed 2-8 19 51

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

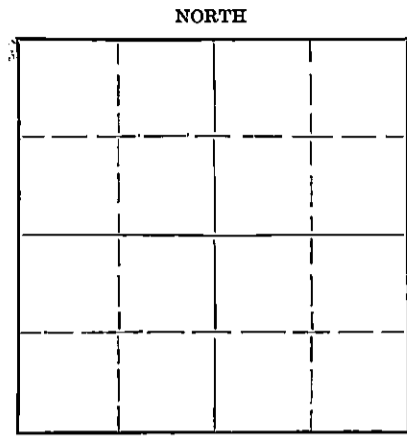

Locate well correctly on above
Section Plat

Name of Conservation Agent who supervised plugging of this well C. D. Stough

Producing formation Depth to top Bottom Total Depth of Well 3683 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
Lansing-KC	Water	3298'	3552'	8-5/8" 5-1/2"	653' 3660'	none 2780'
Arbuckle	Water	3658'	3683'			

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Hole plugged from 3683' to 3650' with crushed rock & 5 sax cement. Filled hole w/ heavy mud to 250'. Set rock bridge. Dumped 15 sax cement w/bailer. Filled hole to 30' of top. Mixed 10 sax cement for cap on well.

RECEIVED
STATE CORPORATION COMMISSION
FEB 15 1951
CONSERVATION DIVISION
Wichita, Kansas

2-15-51

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to Sunray Oil Corporation
Address Box 195, Great Bend, Kansas

STATE OF KANSAS, COUNTY OF BARTON, ss.
H. O. Wikle (employee of owner)

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) H. O. Wikle Office Manager

Box 195, Great Bend, Kansas (Address)

SUBSCRIBED AND SWORN TO before me this 13 th day of February, 19 51.

(Signature) Notary Public

My commission expires April 19, 1952.

PLUGGING
FILE SEC 15 T 22 R 12 W
BOOK PAGE 55 LINE 36

J. MESSERLY #1
SUNRAY OIL CORPORATION

NW NW NE Sec. 15-22S-12W
Stafford County, Kansas

Sand & clay	0	65
Sand	65	150
Sand, clay	150	275
Shale, sand	275	375
Red bed, Red rock	375	645
Anhydrite	645	690
Shale shells	690	770
Shale shells	770	1455
Shale	1455	1560
Anhydrite	1560	1620
Shale, lime	1620	1660
Shale, sandy lime	1660	1880
Lime, shale	1880	2150
Lime	2150	2250
Shale	2250	2770
Shale & lime	2770	3100
Lime	3100	3150
Lime & shale	3150	3372
Lime	3372	3535
Lime chert	3535	3571
Chert	3571	3597
Shale & sand	3597	3620
Shale & lime	3620	3664

Tops:	Lansing	3298
	Viola	3552
	Simpson	3597
	Arbuckle	3658
	R.T.D.	3664

RECEIVED
STATE CORPORATION COMMISSION
FEB 15 1951
CONSERVATION DIVISION
Wichita, Kansas

I, the undersigned, do hereby certify that the above is a true and accurate log of the J. Messerly #1, to the best of my knowledge, located NW NW NE Sec. 15-22S-12W, Stafford County, Kansas.

PLUGGING
FILE SEC 15 T 22 R 12W
BOOK PAGE 55 LINE 36

Howie
Office Manager

Subscribed to and sworn before me this 14th day of February, 1951.

Martha Scott
Notary Public

My Commission Expires: 4/19/52.