


All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bitting Building
Wichita, Kansas

NORTH

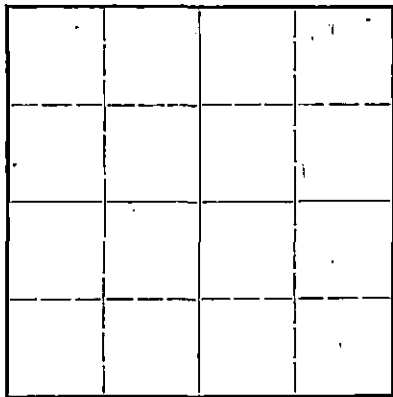

Locate well correctly on above
Section Plat

Barton County. Sec. 1 Twp. 16S Rge. (E) 12 (W)

Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines. SE SW NE

Lease Owner The Palmer Oil Corporation

Lease Name Woydziak Well No. 1

Office Address 415 Union National Bank Bldg., Wichita 2, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 7/6/48 19

Application for plugging filed 7/6/48 19

Application for plugging approved 7/6/48 19

Plugging commenced 7/6/48 19

Plugging completed 7/6/48 19

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Ruel Durkee

Producing formation Depth to top Bottom Total Depth of Well 3345 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Table with 7 columns: Formation, Content, From, To, Size, Put In, Pulled Out. Row 1: 8 5/8", 160, None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

3345 - 160 Heavy Mud
160 Plug
160 120 15 sacks cement
120 30 Heavy Mud
30 Plug
30 bottom of cellar 5 sacks cement

LIBRARY
07-31-48

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to The Palmer Oil Corporation
Address 415 Union National Bank Bldg., Wichita 2, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

A. H. Smith (employee of owner) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.


(Signature) A. H. Smith

(Address)

SUBSCRIBED AND SWORN to before me this 29th day of July, 1948

Bonnie Durrall
Notary Public.

My commission expires March 21, 1949



WELL LOG - WOYDZIAK #1

Well Owner: The Palmer Oil Corporation
 Contractor: The Palmer Oil Corporation

Sec. 1-168-12W
 Location: SE SW NE
 County: Barton County, Kansas
 Elevation: 1868 D. F.
 Results: Dry Hole

Commenced: 6/25/48
 Completed: 7/6/48

Casing Record
 8 5/8" - 160' cemented 80 az.

Clay & shells	0	145
Shells	145	160
Shale & shells	160	200
Sand	200	230
Red rock	230	330
Sand	330	435
Iron	435	450
Shale & shells	450	835
Red bed	835	900
Shale & shells	900	1165
Salt	1165	1390
Shale & shells	1390	1725
Shale & lime	1725	1800
Lime	1800	1810
Shale & lime	1810	2110
Shale	2110	2235
Shale & lime	2235	2480
Shale	2480	2530
Shale & lime	2530	2790
Lime	2790	2888
Lime & shale	2888	3085
Lime	3085	3138
Lime & shale	3138	3335
Conglomerate	3335	3345 T. D. in congl.

FORMATION TOPS (D. F.)

Topeka	2658
Heetner	2920
Brown Lime	3015
Lansing	3027
Martinton	3300
Scoy Conglomerate	3307

This is to certify that the above is a true and correct log, according to the daily drilling reports.

THE PALMER OIL CORPORATION

A. H. Smith

STATE OF KANSAS)
 COUNTY OF SEDGWICK) SS

Subscribed and sworn to before me, a Notary Public in said County and State, this 29th day of July, 1948.

Donnie D. Wall
 Notary Public

My commission expires 3/21/49.

