



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

P.O. Box 17027 3830 S. Meridian

WICHITA, KANSAS

STATE CORPORATION COMMISSION

NOV 7 1973

CONSERVATION DIVISION  
Wichita, Kansas

7-7-73

VERBAL PERMIT FORM  
(To Be Filed By Plugging Agent)

J. Lewis Brock  
Administrator  
500 Insurance Building  
Wichita, Kansas 67202

Dear Sir:

Mr. Wood of Texaco has this

date requested permission to plug the following described well:

Mr. Wood guarantees payment of the plugging fee.

Operator's full Name: Texaco Inc.

Complete Address: Box 2420, Tulsa, Oklahoma

Lease Name: E. P. Ward Well No. 1

Location: C SE SW Sec. 16 Twp. 22 Rge. 33 (E) (W)

County: Finney Total Depth 4830' Oil Well X

Gas Well      Input Well      SWD Well      D & A      Lost Hole     

Mr. Wood was instructed to plug the well as follows:

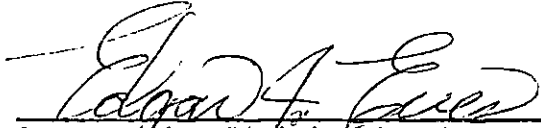
8 5/8" to 403' circulated w/ cement. 4 1/2" to 4830' cemented.

Top perforations 4427' Plug bottom w/ 35 sacks cement.

Top of cement 2600' Mud 2600' to 420'

Spot 40 sacks cement 420' to 0'.

Very truly yours,

  
Conservation Division Agent