


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

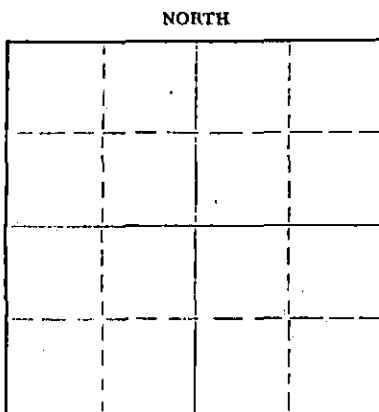

Locate well correctly on above
Section Plat

Barton County, Sec. 2 Twp. 16 Rge. 12 (E) W (W)
Location as "NE/CNW&SW" or footage from lines NE SE NE
Lease Owner Glickman Oil Comply
Lease Name Weber Well No. 3
Office Address Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed 1-28- 19 63
Application for plugging filed 9-12- 19 67
Application for plugging approved 9-14 19 67
Plugging commenced Sept. 16 19 67
Plugging completed Oct. 3 19 67
Reason for abandonment of well or producing formation Reached economic limits
If a producing well is abandoned, date of last production 1964
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Truan
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3357 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	274'	None
				5-1/2"	3352'	2983'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from 3357 feet to surface _____ feet for each plug set.

Sanded up to 3340' dump 5 sacks of cement on bottom. Pulled pipe from hole pump 20 sacks of mud & 100 sacks of cement in hole. Well completed.

RECEIVED
STATE CORPORATION COMMISSION
OCT 13 1967

10-13-67
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Barnes & Sons Pipe Pulling Co.
Address P.O. Box 313 Russell, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Milton Glickman (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.
(Signature) [Signature]
702 S. St. Francis, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN to before me this 12th day of October, 1967

My commission expires November 19, 1967
Lorella Schauf
Lorella Schauf Notary Public.

GLICKMAN OIL COMPANY

P. O. Box 3108
Wichita, Kansas

DRILLERS WELL LOG

Company: Glickman Oil Company

Location: NE SE NE

Farm: Weber Well No. 3

Sec. 2-16S-12W

Barton County, Kansas

Commenced: 1-17-63

Elevation: 1893 K. B.

Completed: 1-28-63

Total Depth: 3357'

Casing: 8-5/8" @ 274' w/150 sxs,
5-1/2" @ 3352' w/50 sxs.

Production:

Geologist: Frank Brooks

Figures Indicate Bottom of Formations

274	Soil, Clay & Shale
748	Red Bed & Shale
779	Anhydrite
1510	Red Bed & Shale
1740	Shale & Lime
1923	Lime & Shale
2800	Shale & Lime
2930	Lime
3080	Lime & Shale
3212	Lime
3349	Lime & Shale
3352	Arbuckle
3357	Lime

TOPS

Anhydrite	748
Topeka	2674
Heebner	2956
Brown Lime	3048
Lansing	3062
Conglomerate	3333
Arbuckle	3349

RECEIVED
STATE CORPORATION COMMISSION

SEP 14 1967

CONSERVATION DIVISION
Wichita, Kansas

Completed - open hole

STATE OF KANSAS, COUNTY OF SEDGWICK, ss:

I, Milton Glickman, of the Glickman Oil Company, upon oath state that the above and foregoing is a true and correct copy of the log of the Weber #3

Milton Glickman

Subscribed and sworn to before me this 4th day of February, 1963

Lorella Schauf

Notary Public

My Commission Expires: November 19, 1963