

DISTRICT CONSERVATION AGENT'S REPORT

TO:

State Corporation Commission
Conservation Division
800 Bitting Building
Wichita, Kansas

FILE NO. ✓LOCATION 1W-1W-NESEC. 30 TWP. 23 RGE. 3WDry Hole Abandoned Oil Well ✓ Abandoned Gas Well

I have today completed supervision of plugging of:

Well No. 3 Lease Katie SchmidtOperator Magnolia Petr. Co. Address Ellinwood, KansField Hollow County HarveyTotal Depth 3579 Feet.


(Describe briefly the manner in which the well was plugged)

Due to an unintentional error, the operator plugged the lower formations, shot off the pipe at approx. 2000' and were laying casing down before I was notified they were plugging this hole. Their explanation as to how they had plugged the lower formations was *

Paul [Signature]
District Conservation Agent

Date 4-5-45

30 23 3W
7 27

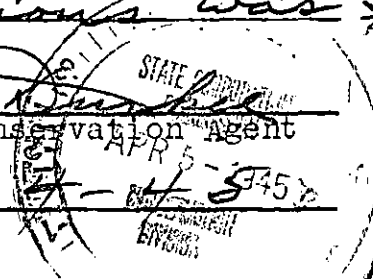

very satisfactory so I instructed them to go ahead, with these requests:-

Mud hole up into $13\frac{3}{8}$ and make hole solid at 300' and dump 30 sf of cement at 300' and mud hole up to approx. top of surface pipe + put 10 sf of cement at top of surface pipe, which they did.

Hence I feel this hole is plugged in a very satisfactory manner.

Paul Burke