
CP-3

## KANSAS STATE CORPORATION COMMISSION

J. P. Roberts
Assitant Director
500 Insurance Building
212 North Market
Wichita 2, Kansas

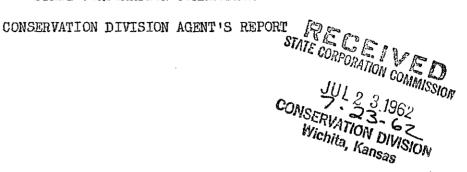

Operator's Full Name E. K. Edmiston
Complete Address: 501 First Natl Bk, Bldg Wichita Kansas
Lease Name Weber Well No. 1
Location SE NE NW - Seco. 2 Twp. 16 Rge. 12 (E) (W)
County Barton Total Depth 3361
Abandoned Oil Well X Gas Well Input Well SWD Well D & A (X)
Other well as hereafter indicated:
Plugging Contractor: Central Pipe Pulling
Address: 1416 Cooledge, Great Bend Kansas License No. 459
Operation Completed: Hour 6 pm Day 17 Month July Year 1962
The Above well was plugged as follows:
TD-3361 52" set at 3336! 8 5/8" set at 323! cwc.
Sand to 3320 topped with 5 sax cement dumped with dump bailer.
Shot Pipe at 2953' and pulled same out of hole, chunk mud to 300',
rock bridge and 20sax cement, mud to 401,101 rock bridge, and 10 sax
cement, cementing to base of cellar.
I hereby certify that the above well was plugged as herein stated to P. Leiker Signed: Signed:
DATE 7/23/62 Well Plugging Supervisor INV. NO. 5415-W
INV. NO 5415-4