

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 9 Twp. 22S Rge. (E) 11 (W)

Location as "NE/CNW/SW" or footage from lines NW NE NW

Lease Owner Rains & Williamson Oil Company

Lease Name Fair Well No. 3

Office Address 1425 Wichita Plaza Bldg., Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed 3-30 1966

Application for plugging filed 3-30 1966

Application for plugging approved 3-30 1966


Plugging commenced 3-30 1966

Plugging completed 3-30 1966

Reason for abandonment of well or producing formation no oil or gas found in commercial quantities.

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

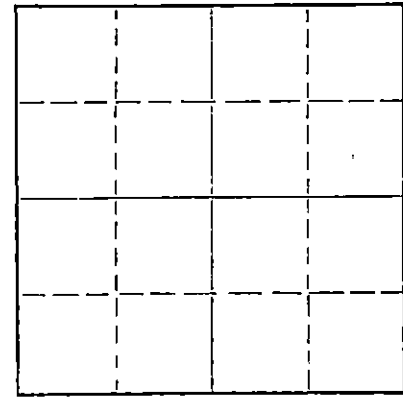

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Archie Elving, Pratt, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3500 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	256	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Pushed plug to 240' Cement thru drill pipe 25 sacks cement. Mud back to 40' set solid bridge and capped with 10 sacks. 2 sacks in rat hole.

RECEIVED
STATE CORPORATION COMMISSION

APR 4 1966

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Rains & Williamson Oil Company

Address 1425 Wichita Plaza Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.

Lloyd R. Williamson, Partner (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. (So help me God.)

(Signature) Lloyd R. Williamson

Lloyd R. Williamson
1425 Wichita Plaza Building, Wichita, Ks.
(Address)

SUBSCRIBED AND SWORN TO before me this 1st day of April, 1966

Mary J. Brown
Mary J. Brown
Notary Public.

My commission expires March 3, 1970

ROTARY DRILLING LOG

Operator: Rains & Williamson Oil Co. Contractor: Rains & Williamson Oil Co.
 #3 Fair Commenced: 3-21-66
 NW NE NW Sec. 9-22S-11W Completed: 3-30-66
 Stafford County, Kansas Remarks: Set 256' of 8-5/8" surface pipe with 160 sacks of GL3.

FORMATIONS

Sand & Shale	15'
Red Bed & Shale	474'
Anhydrite	485'
Shale & Shells	1265'
Shale & Lime	1565'
Lime & Shale	1810'
Lime	1990'
Lime & Shale	2167'
Shale & Lime	2475'
Shale	2735'
Shale & Lime	2835'
Lime & Shale	2930'
Lime	3442'
Lime & Shale	3480'
Lime	3500'
Rotary Total Depth (D & A)	3500'

RECEIVED
STATE CORPORATION COMMISSION

APR 4 1966

CONSERVATION DIVISION
Wichita, Kansas

We certify the above log is true and correct to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO.

Lloyd R. Williamson

Subscribed and sworn to before me, a Notary Public in and for the State of Kansas, County of Sedgwick, this 1st day of April, 1966.

My Commission Expires March 3, 1970

Mary J. Brown

 Mary J. Brown Notary Public