


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
211 No. Broadway  
Wichita, Kansas

Stafford County, Sec. 11 Twp. 22 Rge. 13 (E) W (W)

Location as "NE/CNW/SW" or footage from lines SE SE NW  
Lease Owner Dicks Supply Company  
Lease Name Hullman Well No. 1  
Office Address Great Bend, Kansas  
Character of Well (completed as Oil, Gas or Dry Hole)  
Date well completed 19  
Application for plugging filed 19  
Application for plugging approved 19  
Plugging commenced 11-6-62 19  
Plugging completed 11-13-62 19  
Reason for abandonment of well or producing formation Depleted.

NORTH

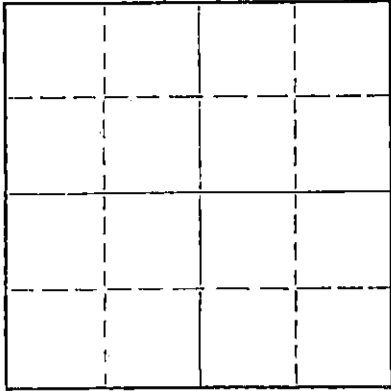

Locate well correctly on above  
Section Plat

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well Bill Lackamp  
Producing formation Depth to top Bottom Total Depth of Well 3741 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO'	SIZE	PUT IN	PULLED OUT
				8-5/8"	323'	None
				5-1/2"	3770'	2961'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Checked hole to 3204', set sand bridge to 3190' and dumped 5 sacks of cement @ 3190' with dump bailer. Pulled 5 1/2" casing and checked fluid to 20'. Mudded to 275', set rock bridge to 265' and dumped 8 sacks of cement with dump bailer. Bailed hole to 260' and ran 17 sacks of cement. Mudded to 40', set rock bridge to 30' and ran 10 sacks of cement to base of cellar.

PLUGGING COMPLETE.

RECEIVED  
STATE CORPORATION COMMISSION

DEC 4 1962

CONSERVATION DIVISION  
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)  
Name of Plugging Contractor KNIGHT CASING PULLING COMPANY  
Address CHASE, KANSAS

STATE OF KANSAS, COUNTY OF RICE, ss.  
Noel J. Knight (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Noel J. Knight  
Chase, Kansas  
(Address)

SUBSCRIBED AND SWORN TO before me this 26th day of November, 1962

My commission expires May 20, 1964

Milton J. Volin  
Notary Public.