


STATE OF KANSAS
STATE CORPORATION COMMISSION
CONSERVATION DIVISION
P. O. BOX 17027
WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

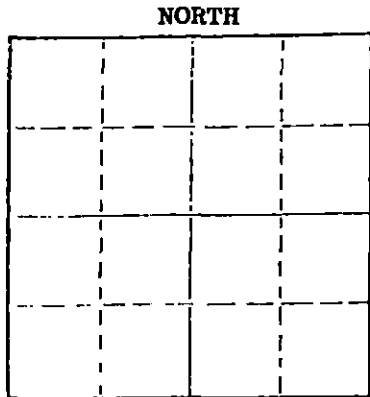

Locate well correctly on above Section Plot

Hodgeman County, Sec. 31 Twp 21S Rge 24W ~~XX~~ ~~XX~~

Location as "NE/CNW/SW" or footage from lines NW NW

Lease Owner Jack Bowles

Lease Name Wright

Well No. 1-31

Office Address 401 Local Federal Bldg., 203 Park Ave. Okla. City

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole Okla. 73102

Date well completed January 5, 19 75

Application for plugging filed Verbal Application 19

Application for plugging approved Verbal Approval 19

Plugging commenced January 5, 19 75

Plugging completed January 5, 19 75

Reason for abandonment of well or producing formation

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Mr. Thomas from Garden City, Kansas

Producing formation Depth to top Bottom Total Depth of Well 4,600 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	371'	None

RECEIVED
STATE CORPORATION COMMISSION

1-13-75

JAN 13 1975

CONSERVATION DIVISION
Wichita, Kansas

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled hole with heavy rotary mud from 4,600 feet (rotary total depth) to 850 feet. Set plug at 850 feet and cemented with 60 sacks cement. Filled hole with heavy rotary mud from 850 feet to 550 feet. Set plug at 550 feet and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 550 feet to 40 feet. Set solid plug at 40 feet and cemented to cellar with 15 sacks cement, 2 sacks cement in rat hole. Plugging operations accomplished utilizing Halliburton Oil Well Cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor H-30, Inc.

Address 200 North Main, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick

Dean Britting, Agent of (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting

200 No. Main, Wichita, Kansas 67202

(Address)


Subscribed and sworn to before me this 10th day of January, 19 75

Elsie Willison

Elsie Willison

Notary Public.

My commission expires June 30, 1978

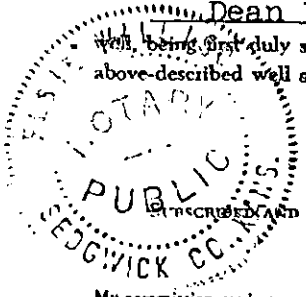

15-093.20413.0000

KANSAS GEOLOGICAL SOCIETY
KANSAS WELL LOG BUREAU - KANSAS WELL SAMPLE BUREAU
KANSAS GEOLOGICAL SOCIETY BUILDING
508 EAST MURDOCK - WICHITA, KANSAS

COMPANY **Jack Bowles**

SEC. 31 T. 21S R. 24W
LOC. NW NW

FARM **Wright**

NO. **1-31**

COUNTY **Hodgeman**

TOTAL DEPTH **4,600'**

COMM. **December 26, 1974**


COMP. **January 5, 1975**

KANSAS

SHOT OR TREATED

CONTRACTOR **H-30, Inc.**

ISSUED



CASING

20	10	
15	8-5/8"	371' cemented w/250 sxs cement ELEVATION 2,389' GL
12	6	
13	5	

PRODUCTION

FIGURES INDICATE BOTTOM OF FORMATIONS

Shale	372'
Red Bed, Shale and Sand	1,610'
Anhydrite	1,663'
Shale and Lime	2,343'
Lime and Shale	3,130'
Shale and Lime	3,446'
Lime and Shale	3,985'
Lime	4,600'
Rotary Total Depth	4,600'

RECEIVED
STATE CORPORATION COMMISSION
JAN 13 1975
CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting

Dean Britting

State of Kansas }
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 10th. day of January, 1975.

Elsie Willison

Elsie Willison - Notary Public



My Commission Expires:
June 30, 1978