



State Corporation Commission

CONSERVATION DIVISION

(Oil, Gas and Water)

500 Insurance Bldg. 212 N. Market

WICHITA, KANSAS 67202

VERBAL PERMIT FORM
(To Be Filed By Plugging Agent)

4-14-72

RECEIVED
STATE CORPORATION COMMISSION
APR 14 1972
CONSERVATION DIVISION
Wichita, Kansas

J. Lewis Brock
Administrator
500 Insurance Building
Wichita, Kansas 67202

Dear Sir:

Mr. Crowe of Skelly has this

date requested permission to plug the following described well:

Mr. Crowe guarantees payment of the plugging fee.

Operator's full Name: Skelly Oil Company

Complete Address: 1860 Lincoln Street, Denver, Colo.

Lease Name: Betts "B" Well No. 1

Location: C NW SE Sec. 29 Twp. 21 Rge. 33 (W)

County: Finney Total Depth 4802' Oil Well

Gas Well Input Well SWD Well D & A Lost Hole

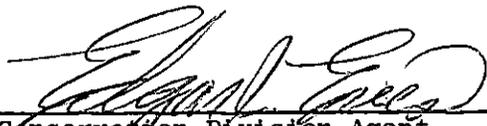
Mr. Crowe was instructed to plug the well as follows:

10 3/4" to 805' circulated w/ cement. Mud 4802' to 800'

Spot 35 sacks cement 800' to 730' Mud 730' to 45'

Plug, Hulls & 15 sacks cement 45' to 0'.

Very truly yours,


Conservation Division Agent