


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

Stafford County, Sec. 9 Twp. 23 Rge. 11W (E) (W)

Location as "NE/CNW/SW" or footage from lines NW SW SE
Lease Owner National Drilling Company
Lease Name Welsh Well No. 1
Office Address 531 Petroleum Building Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Oil
Date well completed March 6, 19 57
Application for plugging filed December 14, 19 62
Application for plugging approved November 26, 19 62
Plugging commenced November 30, 19 62
Plugging completed November 30, 19 62
Reason for abandonment of well or producing formation

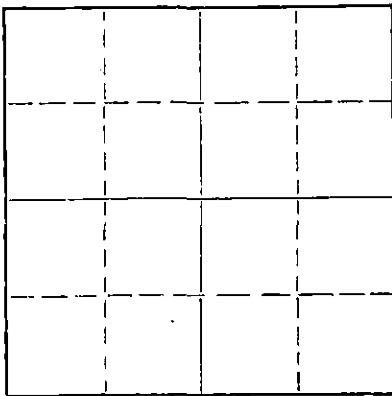

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Herman Justus
Producing formation Depth to top Bottom Total Depth of Well 4060' Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8"	259'	
				4-1/2"	4028'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

4028' of 1 1/2" long string cemented with 140 sacks cement, plugged at 3765'. Top perforation at 3748', sanded to 3730' and 3 sacks cement. Hole filled to 200' with mud, 10' rock bridge and 20 sacks cement. Hole filled to 40' with mud, 10' rock bridge and 10 sacks cement to base of cellar.

RECEIVED 8-17-66
STATE CORPORATION COMMISSION
AUG 17 1966
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor R & D Casing Pulling Company
Address 600 E. 30th Hutchinson, Kansas # 236

STATE OF _____, COUNTY OF _____, ss.

(employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Edward A. Starbuck

SUBSCRIBED AND SWORN TO before me this 17th day of August, 1966
Edward B. Greider (Address)

My commission expires 11-5-67 Notary Public.

WELL LOG BUREAU—KANSAS GEOLOGICAL SOCIETY
508 East Murdock, Wichita, Kansas.


15-185-12112-0001

Company. WILKINSON DRIG.
Farm. Welsh No. 1

SEC. 9 T. 23 R. 14W
NW SW SE

Total Depth. 4060'
Comm. 2-22-57 Comp. 3-6-57
Shot or Treated.
Contractor. Wilkinson Drlg.
Issued. 4-5-58

County Stafford
KANSAS



CASING:
8" 259' cem w/175 sx.

Elevation. 1965'

Production. Dry

Figures indicate Bottom of Formations.

sand, shale	259
shale	280
red bed, shale shells	1140
Anhydrite	1295
shale, shells	1875
shale, lime	3545
lime	3805
lime, shale	3890
lime, shale, chert	3962
lime	3991
Dolomite, sand	4009
Dolomite	4060
Total Depth	

TOPS: SCOUT	
Heebner	3407
Brown Lime	3539
Lansing	3559
Viola	3921
Simpson Shale	3950
Simpson Sand	3968
Arbuckle	4009

RECEIVED
STATE CORPORATION COMMISSION
JUL 16 1964
CONSERVATION DIVISION
Wichita, Kansas