

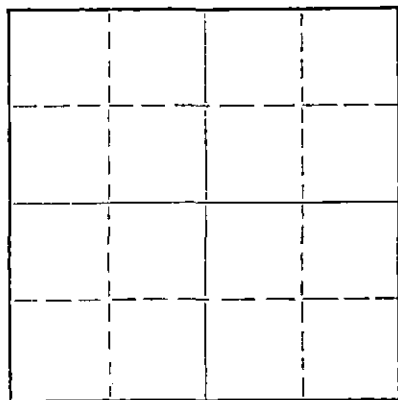
STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Pawnee County. Sec. 1 Twp. 21S Rge. 16W (E) (W)
Location as "NE/CNW/SW" or footage from lines SW SW SW
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name BARRETT Well No. 2
Office Address 800 Biting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed January 16, 1963 19__
Application for plugging filed October 16, 1964 19__
Application for plugging approved October 19, 1964 19__
Plugging commenced October 23, 1964 19__
Plugging completed October 25, 1964 19__
Reason for abandonment of well or producing formation non-productive in commercial quantities
If a producing well is abandoned, date of last production October 15, 1964 19__
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

NORTH



Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Eldon Petty
Producing formation Arbuckle Depth to top 3795 Bottom _____ Total Depth of Well 3808 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	979	cemented
				5 1/2"	3800	3226 ft.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled with sand from 3808 feet to 3790 feet. Ran 5 sacks of cement from 3790 feet to 3760 feet. Pulled pipe to 700 feet and pumped 28 sacks of mud and 20 sacks of cement. Pulled pipe to 240 feet and pumped 20 sacks of cement. Pulled pipe to 30 feet and pumped 10 sacks of cement from 30 feet to base of cellar

RECEIVED
STATE CORPORATION COMMISSION

NOV 3 1964

CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn & Smith Pipe Pulling Company 11-3-64
Address Box 156, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dwight J. Wilson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dwight J. Wilson
800 Biting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 2nd day of November, 1964

My commission expires August 10, 1965
Virginia Mundell Notary Public.



WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: 1-2-63

Contractor: Quaker Drilling Co., Inc.

Completed: 1-11-63

Barrett No. 2
SW SW SW Sec. 1-21S-16W
Pawnee County, Kansas

Elevation: 1976 K.B.

Casing Record

Set 8 5/8 inch casing at 979 feet with 475 sacks cement
Set 5 1/2 inch casing at 3800 feet with 100 sacks cement

(Figures Indicate the Bottom of the Formation)

<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Shale and Sand	150	Heebner	3328 -1352
Shale and Shells	403	Brown Lime	3419 -1443
Dakota Sand	515	Lansing	3431 -1455
Shale	519	Base of KC	3667 -1691
Red Bed and Sand	745	Viola	3699 -1723
Red Bed	900	Simpson	3766 -1790
Shale and Shells	970	Arbuckle	3795 -1819
Anhydrite	997	Rotary Total	
Shale	1040	Depth	3808 -1838
Shale and Shells	1650		
Lime and Shale	3808		


RECEIVED
STATE CORPORATION COMMISSION

OCT 19 1964


CONSERVATION DIVISION
Wichita, Kansas

We hereby certify the foregoing to be a true and correct copy of the Driller's Log of the well drilled in the SW SW SW of Section 1, Township 21 South, Range 16 West, Pawnee County, Kansas.

QUAKER DRILLING CO., INC.

By: 
~~XX~~
 Dwight J. Wilson, Secretary

SUBSCRIBED AND SWORN TO before me a Notary Public this 17th day of January, 1963.


 Virginia Mundell, Notary Public

MY COMMISSION EXPIRES:
August 10, 1965