


STATE OF KANSAS
STATE CORPORATION COMMISSION

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

WELL PLUGGING RECORD

R

NORTH



Locate well correctly on above
Section Plat

Pawnee County. Sec. 1 Twp. 21S Rge. 16W (E) (W)
Location as "NE/CNW/SW" or footage from lines NE SW SW
Lease Owner ALPINE OIL & ROYALTY CO., INC.
Lease Name BARRETT Well No. 3
Office Address 800 Bitting Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) oil well
Date well completed March 21, 1963 19
Application for plugging filed February 18, 1966 19
Application for plugging approved February 18, 1966 19
Plugging commenced February 21, 1966 19
Plugging completed February 23, 1966 19
Reason for abandonment of well or producing formation non-productive in
commercial quantities
If a producing well is abandoned, date of last production February 18, 1966 19
Was permission obtained from the Conservation Division or its agents before plugging was com-
menced? Yes

Name of Conservation Agent who supervised plugging of this well Gilbert Leiker
Producing formation Arbuckle Depth to top 3778 Bottom Total Depth of Well 3785 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	980'	cemented
				5 1/2"	2804' 3782'	2904'

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Filled with sand from 3785 feet to 3770 feet. Ran 5 sacks cement from 3770 feet to 3740 feet. Heavy mud from 3740 feet to 480 feet. Rock from 480 feet to 470 feet. Ran 25 sacks of cement from 470 feet to 395 feet. Heavy mud from 395 feet to 40 feet. Rock and 10 sacks of cement from 40 feet to base of cellar.

RECEIVED
STATE CORPORATION COMMISSION
3-7-66
MAR 7 1966

CONSERVATION DIVISION
WICHITA, KANSAS

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Glenn and Smith Pipe Pulling Company
Address Box 156, Ellinwood, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Dwight J. Wilson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Dwight J. Wilson*
800 Bitting Building, Wichita, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 7th day of March, 1966

My commission expires August 10, 1969

Virginia Mundell
Notary Public.

WELL LOG

ALPINE OIL & ROYALTY CO., INC.

Commenced: March 8, 1963

Contractor: Quaker Drilling Co., Inc.

Completed: March 17, 1963

No. 3 Barrett
NE SW SW Sec. 1-21S-16W
Pawnee County, Kansas

Elevation: 1973 K.B.

Casing Record


8 5/8 inch casing set at 980 feet with 450 sacks cement
5 1/2 inch casing set at 3782 feet with 100 sacks cement

(Figures Indicate the Bottom of the Formations)

<u>FORMATION</u>	<u>DEPTH</u>	<u>FORMATION TOPS</u>	
Surface Soil	70	Heebner	3323 -1350
Shale and Shells	404	Brown Lime	3414 -1441
Dakota Sand	515	Lansing	3425 -1452
Red Bed, Shale and Sand	625	Base of Kansas	
Red Bed, Shale	850	City	3663 -1690
Shale and Shells	970	Viola	3690 -1717
Anhydrite	997	Simpson	3746 -1773
Shale and Shells	1675	Arbuckle	3778 -1805
Shale and Lime	2080	Rotary Total	
Sandy Lime and Shale	2220	Depth	3785 -1812
Lime and Shale	3085		
Lime	3175		
Lime and Shale	3428		
Lime	3695		
Cherty Lime and Shale	3755		
Lime and Shale	3785		

We hereby certify the foregoing to be a true and correct copy of the driller's log of the well drilled in the NE SW SW Sec. 1-21S-16W, Pawnee County, Kansas.

QUAKER DRILLING CO., INC.

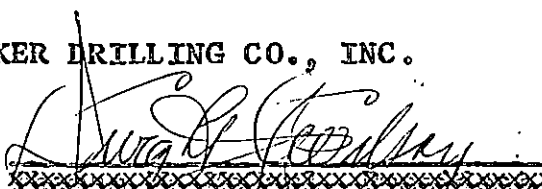By: 
Dwight J. Wilson, Secretary-Treasurer

SUBSCRIBED AND SWORN TO BEFORE ME A NOTARY PUBLIC THIS 19th day of March, 1963.


Virginia Mandell, Notary Public

MY COMMISSION EXPIRES:
August 10, 1965

RECEIVED
STATE CORPORATION COMMISSION

FEB 18 1966

CONSERVATION DIVISION
Wichita, Kansas