

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Bessing Building
Wichita, Kansas

Pawnee County, Sec. 25 Twp. 21 Rge. 20 (E) (W)

Location as "NE/CNW/SW" or footage from lines SE SE SW

Lease Owner Welch & Olsson Drilling Co. Inc.

Lease Name Eveleigh Well No. #1

Office Address 203 Rule Bldg. Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) D&A

Date well completed 1-7 19 55

Application for plugging filed 1-7 19 55

Application for plugging approved 1-7 19 55


Plugging commenced 1-7 19 55

Plugging completed 1-7 19 55

Reason for abandonment of well or producing formation D & A

If a producing well is abandoned, date of last production None 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

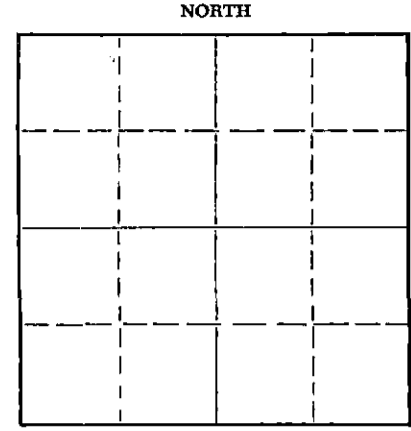

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well M. A. Rives Box 8, Pratt, Kansas

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4540 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	955'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

First plug pumped to 300' with 30 sacks cement. Second

Plug pumped to 35' with 10 sacks cement.

Total 40 sacks cemented with service truck

Name of Plugging Contractor Welch & Olsson Drilling Co. Inc. (If additional description is necessary, use BACK of this sheet)
Address 203 Rule Bldg. Wichita, Kansas.

STATE OF Kansas COUNTY OF Sedgwick ss.
R. E. Welch (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *R. E. Welch*

203 Rule Bldg. Wichita, Kansas.

(Address)

SUBSCRIBED AND SWORN to before me this 13th day of January 19 55

My commission expires June 12, 1955

Notary Public.

PLUGGING
FILE SEC 25 T 21 R 20 W
BOOK PAGE 90 LINE 16

RECEIVED
DIVISION
1-18-55

WELL LOG.

WELCH & OLSSON DRILLING COMPANY, INC.

Elevation: 2099 R. E.

CONTRACTOR: Welch & Olsson Drilling Co. Inc.

Comm. Drlg: 12-13-54

WELL: #1
SE SE SW 25-21-20W,
Pawnee County, Kansas.

Comp. Drlg: 1-6-55

Production: D & A.

Casing Record:
Set 955' of 8 5/8" with 500 sacks.

(Figures indicate bottom of Formations.)

<u>FORMATIONS:</u>	<u>DEPTHS</u>		<u>FORMATIONS TOPS.</u>	
Sand & Shale:	175	Anhydrite:	(1215)	(Plus 834)
Shale:	425	Heobner:	3615	(-1516)
Red Bed:	540	Lansing--Kansas City:	3674	(-1575)
Hard Shells & Sand:	560	Conglomerate:	4181	(-2082)
Sand:	595	Mississippian:	4243	(-2144)
Shale & Red Bed:	800	Kinderhook Sand (Wisener):	4283	(-2184)
Shale & Shells:	2055	Viola:	4304	(-2205)
Shale & Lime:	2410	Simpson:	4511	(-2412)
Lime & Shale:	2730	Arbuckle:	4523	(-2424)
Shale & Lime Stk.	2685			
Shale & Lime:	3060			
Shale & Shells:	3130			
Lime & Shale:	3615			
Shale:	3620			
Lime:	4210			
Conglomerate:	4254			
Lime:	4283			
Sand:	4305			
Lime:	4540 T.D.			

STATE OF KANSAS,)
) SS:
SEDGWICK COUNTY,)

I hereby certify that the above is a true and correct copy of Drillers Log of Well drilled in the SE SE SW of Section 25, Township 21 South, Range 20 West, Pawnee County, Kansas.

WELCH & OLSSON DRILLING COMPANY, INC.

BY *R. E. Welch*
R. E. WELCH

Subscribed and sworn to before me this 13th day of January, 1955.

Reed Shaw
Notary Public.

My commission expires:
June 12, 1955

