


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

WELL PLUGGING RECORD

NORTH

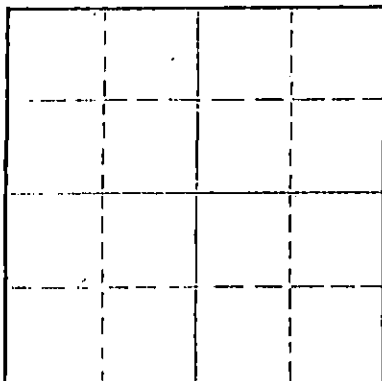

Locate well correctly on above
Section Plot

HODGEMAN County, Sec. 15 Twp. 21 Rge. 21 (E)W (W)
Location as "NE/CNW&SW" or footage from lines. NW NW

Lease Owner BEARDMORE DRILLING COMPANY

Lease Name ROBINSON-WATERS Well No. 1

Office Address 700 ONE TWENTY BUILDING, WICHITA, KANSAS

Character of Well (completed as Oil, Gas or Dry Hole) OIL

Date well completed 6-6 19 64

Application for plugging filed 11-20 19 67

Application for plugging approved 11-20 19 67

Plugging commenced 11-24 19 67

Plugging completed 12-5 19 67

Reason for abandonment of well or producing formation DECLINE IN OIL PRODUCTION

If a producing well is abandoned, date of last production 9-18 19 67

Was permission obtained from the Conservation Division or its agents before plugging was commenced? YES

Name of Conservation Agent who supervised plugging of this well EDGAR. EVES

Producing formation MISSISSIPPI Depth to top. 4317 Bottom 4323 Total Depth of Well 4323 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
CLAY & SHALE		0	490'			
SHALE & RED BEDS		490'	740'			
SAND		740'	920'			
SHALE & RED BEDS		920'	1297'			
ANHYDRITE		1297'	1309'	8-5/8"	1,309'	NONE

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

1,195' TO 1,264' - 23 SACKS CEMENT

(BATTLED HOLE DRY)

1,264' TO 1,285' - 7 SACKS CEMENT

1,285' TO 1,302' - ROCK BRIDGE

1,302' TO 4,270' - HEAVY MUD

(PULLED 2,197' OF 5 1/2" CASING)

4,300' TO 4,270' - 5 SACKS CEMENT

4,323' TO 4,300' - SAND

CUT OFF CASING HEAD 5 FEET BELOW SURFACE

RECEIVED
STATE CORPORATION COMMISSION
JAN 19 1968
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor GLENN & SMITH PIPE PULLING COMPANY

Address ELLINWOOD, KANSAS

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Heber Beardmore (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) *Heber Beardmore*

700 - 120 BUILDING, WICHITA, KANSAS

(Address)

Subscribed and sworn to before me this 15 day of JANUARY, 19 68

Shirley Ann Jackson
SHIRLEY ANN JACKSON Notary Public.



ROTARY DRILLING LOG

15-083-10016-0000

Operator: Beardmore Drilling Company
 #1 ROBISON-WATERS
 NW NW Sec. 15-21S-21W
 Hodgeman County, Kansas

Contractor: Rains & Williamson
 Oil Co.
 Commenced: 5-26-64
 Completed: 6-6-64
 Remarks: Set 8-5/8" surface casing at 1302' with 600 sacks common cement. Set 4317' 5-1/2" casing with 75 sacks common cement.

FORMATIONS

Surface Clay	85'
Clay & Shale	200'
Shale	490'
Shale & Red Bed	639'
Anhydrite	651'
Shale & Red Bed	740'
D Sand	920'
Shale & Shells	1030'
Shale & Red Bed	1297'
Anhydrite	1335'
Shale & Shells	2045'
Shale & Lime	2125'
Lime & Shale	2905'
Shale & Lime	3525'
Lime & Shale	4180'
Lime	4194'
Lime & Shale	4323'
Rotary Total Depth	4323'

RECEIVED
 STATE CORPORATION COMMISSION
 NOV 20 1964
 CONSERVATION DIVISION
 Wichita, Kansas

We certify the above log is true and correct to the best of our knowledge and belief.

RAINS & WILLIAMSON OIL CO.

Wilson Rains
 Wilson Rains, Partner

Subscribed and sworn to before me, a Notary Public in and for the State of Kansas, County of Sedgwick, this 8th day of June, 1964.

My Commission Expires:
 January 8, 1968

Shirley Keck
 Shirley Keck, Notary Public