


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas 67202

WELL PLUGGING RECORD

NORTH

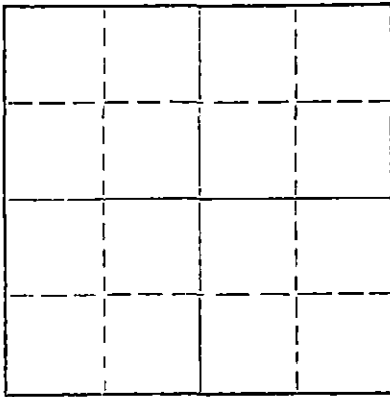

Locate well correctly on above
Section Flat

Hodgeman County. Sec 14 Twp 21 S Rge. (E) 21 (W)
Location as "NE/CNWSW%" or footage from lines C NE NE
Lease Owner Okmar Oil Company
Lease Name Selfridge Well No. 1
Office Address 1130 Wichita Plaza, Wichita, Kansas 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed Dec, 19 19 70
Application for plugging filed Dec, 18 19 70
Application for plugging approved Dec, 18 19 70
Plugging commenced Dec, 18 19 70
Plugging completed Dec, 19 19 70
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19____
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Edgar J. Eves
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
		0	418	8-5/8"	410'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy mud to 350'. Set first plug at 350' with 30 sacks cement. Completed at 10:30 P.M. 12/18/70.
Approximately 12 hours later took the swedge off and found the fluid at 38'. Shoved the top plug to 38'. Covered with 1/2 sack hulls and 10 sacks cement to bottom of cellar.
Job completed at 9:30 A.M. 12/19/70.

RECEIVED
STATE CORPORATION COMMISSION
DEC 24 1970
CONSERVATION DIVISION
Wichita, Kansas


(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, Wichita, Kansas 67202

STATE OF Kansas, COUNTY OF Sedgwick, ss.
James S. Sutton, II (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James S. Sutton
830 Sutton Place, Wichita, Kansas 67202
(Address)



Subscribed and sworn to before me this 22 day of December, 1970

Barbara J. Layton
Barbara J. Layton Notary Public.

My commission expires Feb. 1, 1972

GABBERT-JONES, INC.
WICHITA, KANSAS
DRILLERS' WELL LOG


SELFRIDGE #1
 C NE NW Section 14-21S-21W
 Hodgeman County, Kansas

Commenced: December 16, 1970
 Completed: December 19, 1970

OPERATOR - Okmar Oil Company

DEPTH		FORMATION	REMARKS
From	To		
0	175	Clay and shale	
175	419	Clay, shale and sand	Ran 10 joints 8-5/8" casing, set @ 418' w/300 sacks cement.
419	623	Shale	
623	630	Anhydrite	
630	750	Shale	
750	900	Sand	
900	1283	Shale and red bed	
1283	1306	Anhydrite	
1306	1336	Shale and shells	
1336	TD		Dry and abandoned.


I, James S. Sutton, II, certify this is a correct copy of the Drillers' Well Log for the well drilled in the C NE NW Section 14-21S-21W, Hodgeman County, Kansas to the best of my knowledge and belief.

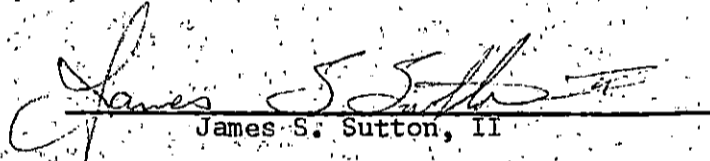
 James S. Sutton, II

STATE OF KANSAS)
) SS.
 COUNTY OF SEDGWICK)

Before me, the undersigned, a Notary Public within and for said County and State, on this 22 day of December, 1970, personally appeared James S. Sutton, II, to me personally known to be the identical person who executed the within and foregoing instrument and acknowledged to me that he executed the same as his free and voluntary act and deed for the uses and purposes therein set forth.

IN WITNESS WHEREOF, I have hereunto set my hand and official seal the day and year last above written.


 Barbara J. Layton, Notary Public

My Commission Expires Feb. 1, 1972.

