

15.083-20622-0000


STATE OF KANSAS
STATE CORPORATION COMMISSION

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to
Conservation Division
State Corporation Comm.
245 North Water
Wichita, KS 67202

Hodgeman County, Sec. 7 Twp. 21SRge. 22W E/W
Location as "NE/CNW $\frac{1}{2}$ SW $\frac{1}{2}$ " or footage from lines _____
SW SW SW

Lease Owner Belama Oil Company
Lease Name Bamberger Well No. 1
Office Address Suite 1830, One Williams Place, Tulsa, Okl.
Character of Well (Completed as Oil, Gas or Dry Hole) _____

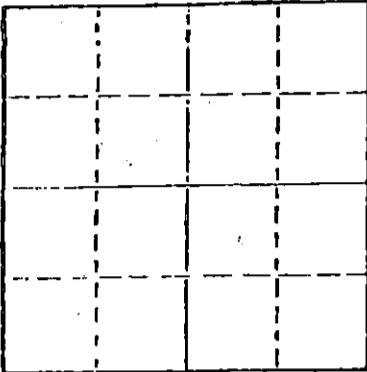

Locate well correctly on above
Section Plot

Dry Hole
Date Well completed October 12, 19 78
Application for plugging filed Verbal Application 19
Application for plugging approved Verbal Approval 19
Plugging commenced October 12, 19 78
Plugging completed October 12, 19 78
Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4490'
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8-5/8	418'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Filled hole with heavy rotary mud from 4490 ft. (Rotary total depth) to 1000 ft. Set plug at 1000 ft. and cemented with 50 sacks cement. Filled hole with heavy rotary mud from 1000 ft. to 400 ft. Set plug at 400 ft. and cemented with 35 sacks cement. Filled hole with heavy rotary mud from 400 ft. to 40 ft. Set solid plug at 40 ft. and cemented to cellar with 10 sacks cement, 5 sacks cement in rat hole.

Plugging operations accomplished utilizing Halliburton Oil Well cementing pump truck through 4 1/2 inch drill pipe.

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Halliburton Services
411 Union Center Building, Wichita, Kansas 67202

STATE OF Kansas COUNTY OF Sedgwick, ss.
Dean Britting, Agent (~~owner~~ of owner) of ~~XXXXXX~~
of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Dean Britting
200 North Main, Wichita, Kansas 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 17th day of October, 19 78



Elsie Willison
Elsie Willison - Notary Public.

My commission expires July 25, 1982

RECEIVED
STATE CORPORATION COMMISSION

OCT 18 1978 10-18-78

CONSERVATION DIVISION
Wichita, Kansas

KANSAS DRILLERS LOG

COMPANY Bolama Oil Company

SEC. 7 T. 21S R. 22W

FARM Bamberger NO. 1

LOC. SW SW SW

COUNTY Hodgeman

ROTARY TOTAL DEPTH 4490'

COMM. October 2, 1978

COMP. October 12, 1978

CONTRACTOR H-30, Inc.

ISSUED October 17, 1978

CASING

10 3/4"

8 5/8" set at 421' cemented w/245 sxs cement

ELEVATION 2262 K.B.

5 1/2"

4 1/2"

FIGURES INDICATE BOTTOM OF FORMATIONS

Sand and Shale	421'
Shale	890'
Sand	1110'
Shale	1439'
Anhydrite	1486'
Shale and Red Bed	1815'
Shale and Lime	2365'
Lime and Shale	2885'
Lime	3115'
Lime and Shale	3230'
Lime	4490'
Rotary Total Depth	4490'

RECEIVED
STATE CORPORATION COMMISSION

OCT 18 1978

CONSERVATION DIVISION
Wichita, Kansas

I hereby certify the above and foregoing to be a true and correct log of the above described well as shown by the drilling reports.

H-30, INC.

Dean Britting
Dean Britting

State of Kansas }
County of Sedgwick } ss:

Subscribed and Sworn to before me a Notary Public in and for said county and state this 17th. day of October, 1978.

Elsie Willison
Elsie Willison - Notary Public

My Commission Expires:

July 25, 1982