


WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
211 No. Broadway
Wichita, Kansas

Hodgeman County, Sec. 16 Twp. 21S Rge. (E) 22 (W)
Location as "NE/CNW/SW" or footage from lines G/SE 1/2 SE 1/2
Lease Owner Mahoney Drilling, Inc.
Lease Name Wieland Well No. #1
Office Address 925 Sutton Place, 209 E. William, Wichita, KS 67202
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 12/18/76 19
Application for plugging filed 12/22/76 19
Application for plugging approved 19
Plugging commenced 12/18/76 19
Plugging completed 12/18/76 19
Reason for abandonment of well or producing formation Dry

NORTH

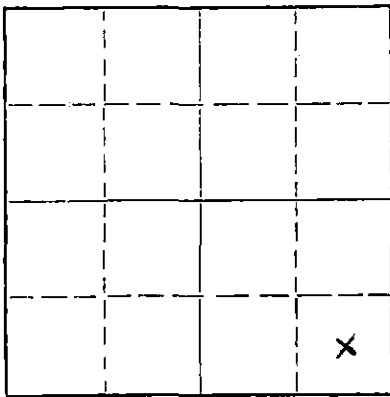

Locate well correctly on above
Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced?

Name of Conservation Agent who supervised plugging of this well Clarence Thomas
Producing formation Depth to top Bottom Total Depth of Well 4500 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				8 5/8"	402.58'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged at 900' with 50 sacks cement,
Plugged at 400' with 35 sacks
Plugged at 40' with solid bridge & 10 sacks
5 sacks in rat hole.

DEC 29 1976 12-29-76

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Gabbert-Jones, Inc.
Address 830 Sutton Place, 209 E. William, Wichita, KS 67202

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.
Barbara Coddington (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Barbara Coddington
925 Sutton Place, 209 E. William, Wichita, KS 67202
(Address)

SUBSCRIBED AND SWORN TO before me this 22nd day of December, 1976

Charlene Pinkham
Charlene K. Pinkham Notary Public.



GABBERT-JONES, INC.
 WICHITA, KANSAS
 DRILLERS' WELL LOG

Wieland #1
 SE SE Sec 16-21S-22W
 Hodgeman County Kansas

Commenced: 12-9-76

Completed: 12-18-76

OPERATOR: MAHONEY DRILLING CO.

Depth		Formation	Remarks
From	to		
0	100	Post Rock	Ran 10 jts of 20# 8 5/8" csg set @ 410' Cemented w/275 sks Common 2% Gel - 3% CC PD @ 11:00 p.m. 12-9-76
100	415	Shale-Sand	
415	460	Shale	
460	915	Shale=Redbed	
915	1105	Sand	
1105	1200	Shale	
1200	1455	Shale-Sand Stks	
1455	1487	Anhy	
1487	1895	Shale-Shells	
1895	2220	Shale	
2220	2347	Shale-Lime Stks	
2347	4100	Lime-Shale	
4100	4500	Lime	
	4500 TD		

STATE OF KANSAS)
) SS
 COUNTY OS SEDGWICK)

I, the undersigned, being duly sworn on oath, state that the above Drillers' Well Log is true and correct to the best of my knowledge and belief and according to the records of this office.


GABBERT-JONES, INC.

James S. Sutton II
 JAMES S. SUTTON II

Subscribed and sworn to before me this 21st day of December, 1976.

Elizabeth J. Edwards
 ELIZABETH J. EDWARDS-NOTARY PUBLIC

My Commission expires February 6, 1976.



DEC 20 1976

WICHITA, KANSAS