


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

WELL PLUGGING RECORD

PAWNEE County, Sec. 8 Twp. 21S Rge. 20W (E) (W)

Location as "NE/CNW/SW" or footage from lines E/2 E/2 SW
 Lease Owner PALOMINO PETROLEUM CO.
 Lease Name Steffen Well No. 1
 Office Address 304 Insurance Bldg. Wichita, Kns. 67202
 Character of Well (completed as Oil, Gas or Dry Hole) Oil
 Date well completed _____ 19____
 Application for plugging filed _____ 19____
 Application for plugging approved _____ 19____
 Plugging commenced 5/17/75 _____ 19____
 Plugging completed 5/22/75 _____ 19____
 Reason for abandonment of well or producing formation No oil
 If a producing well is abandoned, date of last production _____ 19____
 Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

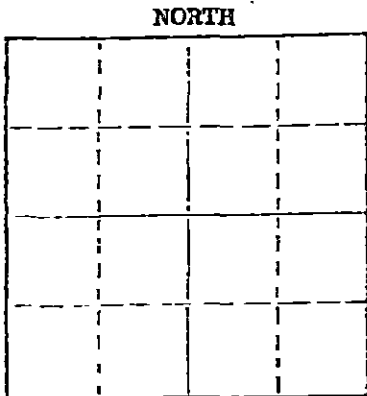

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Leo Massey
 Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well _____ Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS				CASING RECORD		
FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

SAND BACK TO 4200' DUMP 5 SACKS CEMENT.
SHOT PIPE AT 3069-2933-2816-2741-2611-2514-2431-2351-Pull 2351' of 4 1/2" CASING.
Plug hole with 125 sax cement (common) and 25 sax of Gel and 5 sacks of hulls.

(If additional description is necessary, use BACK of this sheet)
 Name of Plugging Contractor DUNBAR DRILLING INC.
 Address 5252 North Broadway, Wichita, Kansas 67219


STATE OF Kansas COUNTY OF Sedgwick ss.
W. P. Simmons (employee of owner) or (owner or operator) of the above-described

well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W.P. Simmons W. P. Simmons
5252 No. Broadway, Wichita, Kns. 67219
 (Address)

SUBSCRIBED AND SWORN TO before me this 5th day of June, 19 75

My commission expires November 19, 1977
Frances J. Simmons Notary Public.



RECEIVED
 CORPORATION COMMISSION
 JUN 9 1975
 CONSERVATION DIVISION
 WICHITA, KANSAS

*REC'D
Mail to
Pat Simmons
Denton, Oklahoma*

DRILLERS' LOG

PALOMINO PETROLEUM
No. 1 Steffen
E/2 E/2 SW, Sec. 8-21S-20W
Pawnee County, Kansas

Elev: 2121 K.B.

Commenced: 3-18-75
Completed: 3-29-75

Surface: 303' of 8-5/8"
cemented w/200 sx common
cement, 2% Gel, 3% cc.
3-19-75

FORMATION

DEPTH

Surface Hole	0 - 310
Shale	310 - 584
Blaine Anhydrite	584 - 594
Shale	594 - 685
Sand	685 - 875
Shale	875 - 990
Shale & Red Bed	990 - 1247
Anhydrite	1247 - 1274
Shale	1274 - 1660
Shale & Lime	1660 - 2085
Lime & Shale	2085 - 3650
Lime	3650 - 4180
Lime & Chert	4180 - 4250
Lime	4250 - 4258 RTD

*4 1/2" (new 10 1/2 #) set at
4250 and cemented with
200 sacks (100 Light,
50 Pbz., 50 salt sat. req.)*

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

D N B DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

The above and foregoing was subscribed and sworn to before me this 2nd day of April 1975.

My Commission Expires:
August 25, 1976

Ella Priess
Ella Priess Notary Public

RECEIVED
STATE CORPORATION COMMISSION
APR 24 1975

CONSERVATION DIVISION
Wichita, Kansas