

STATE OF KANSAS
 STATE CORPORATION COMMISSION
 CONSERVATION DIVISION
 P. O. BOX 17027
 WICHITA, KANSAS 67217

FORM CP-4

WELL PLUGGING RECORD

Pawnee County, Sec 5 Twp 21 Rge 19 (E) (W)

Location as "NE/CNW&SW" or footage from lines. C SW NW

Lease Owner Davis and Reed

Lease Name R. T. SMITH Well No. 1

Office Address P. O. Box 324, Great Bend, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole

Date well completed June 27 19 75

Application for plugging filed June 27 19 75

Application for plugging approved June 27 19 75


Plugging commenced June 27 19 75

Plugging completed June 27 19 75

Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19

Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

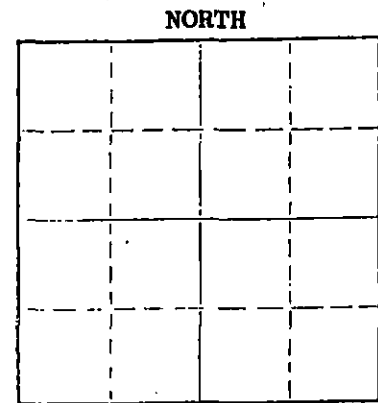

Locate well correctly on above Section Plot

Name of Conservation Agent who supervised plugging of this well Leo Massey

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4352 Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Bottom plug @ 500' w/50 sacks cement thru drill pipe.
Middle plug @ 270' w/25 sacks cement thru drill pipe.
Top plug @ 40' w/1/2 sack hulls and 10 sacks cement. 2 sacks cement in rat hole.

RECEIVED
 STATE CORPORATION COMMISSION

JUN 28 1975

Name of Plugging Contractor Duke Drilling Co. (If additional description is necessary, use BACK of this sheet)
 Address P. O. Box 823, Great Bend, Kansas 67530

CONSERVATION DIVISION
 WICHITA, KANSAS

STATE OF KANSAS COUNTY OF BARTON, ss. 6-30-75

Leonard Williamson (employee of owner) or (owner) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Leonard Williamson
P. O. Box 823, Great Bend, Kansas
 (Address)

SUBSCRIBED AND SWORN TO before me this 27th day of June, 19 75

My commission expires April 11, 1978
Verdely M. Hague Notary Public.

DRILLERS' WELL LOG

DATE COMMENCED: June 19, 1975
 DATE COMPLETED: June 27, 1975

Davis and Reed
 R. T. SMITH # 1
 C SW NW of Sec 5-T21-R19W
 Pawnee County, Kansas

ELEVATION: 2139 K.B.

0 - 95'	Surface Soil and Shale
95 - 197'	Shale
197 - 235'	Sand
235 - 278'	Shale
278 - 308'	Sand
308 - 322'	Shale
322 - 622'	Shale and Sand Streaks
622 - 634'	Elaine Anhydrite
634 - 1298'	Shale, Sand, Red Bed
1298 - 1322'	Anhydrite
1322 - 2035'	Shale, Shells
2035 - 3688'	Lime and Shale
3688 - 3698'	Lime
3698 - 3725'	Shale
3725 - 4011'	Lime
4011 - 4302'	Lime, Shale, Chert, Sand Streaks
4302 - 4352'	Chert
4352'	RTD

FORMATION TOPS

Anhydrite	1298
Heebner	3673
Toronto	3688
Douglas	3698
Lansing	3725
Base K.C.	4011
Pawnee	4049
Marmaton	4137
Fort Scott	4182
Cherokee	4202
Mississippi	4302
RTD	4352

SURFACE PIPE:

Set 322' of 8 5/8", 28# used pipe w/200 sacks 60/40 Pozmix, 2% Gal, 3% cc.

A F F I D A V I T

STATE OF KANSAS)
 COUNTY OF BARTON) ss.

Leonard Williamson, of lawful age, does swear and state that the facts and statements herein contained are true and correct to the best of his knowledge.

Leonard Williamson

Subscribed and sworn to before me this 27th day of June, 1975.

Maureen McLaughlin
 Notary Public

My Commission Expires: April 11, 1978

RECEIVED
 STATE CORPORATION COMMISSION

JUN 30 1975

CONSERVATION DIVISION
 (To be filled)