


STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

WELL PLUGGING RECORD

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
212 No. Market
Wichita, Kansas

NORTH

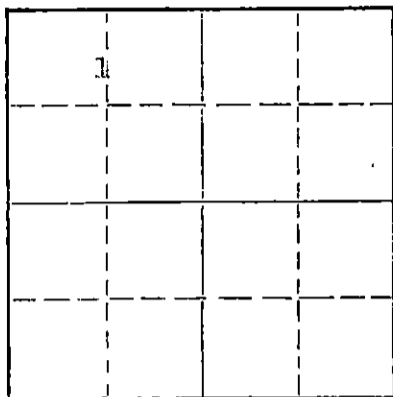

Locate well correctly on above
Section Plat

Pawnee County, Sec. 13 Twp. 21S Rge. 19 ~~EX~~ (W)
Location as "NE/CNW/SW" or footage from lines C SW NE
Lease Owner DNB Drilling, Inc., & Kathol Petroleum, Inc.
Lease Name Canon 'A' Well No. 1
Office Address 737 First National Bank Bldg., Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole
Date well completed 8-20 1969
Application for plugging filed 8-20 1969
Application for plugging approved 8-20 1969
Plugging commenced 8-20 1969
Plugging completed 8-20 1969
Reason for abandonment of well or producing formation No commercial quantities of oil or gas encountered.
If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Leo F. Massey
Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 4310 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
Surface Hole	Water	Sur.	282	8-5/8"	282'	Left in.

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Fluid to 480', plug, 70 sx cement;
Fluid to 270', plug, 20 sx cement;
Fluid to 40', plug, 10 sx cement;
Two sacks cement in rat hole.

RECEIVED
STATE CORPORATION COMMISSION
AUG 26 1969
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)


Name of Plugging Contractor DNB DRILLING, INC.
Address 737 First National Bank Building, Wichita, Kansas 67202

STATE OF KANSAS, COUNTY OF _____, ss.
James L. Donelson (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) James L. Donelson
737 First Nat'l Bank Bldg., Wichita, Ks.
(Address)

Subscribed and sworn to before me this 22nd day of August, 19 69

My commission expires August 25, 1972



Ella Priess
Ella Priess Notary Public.

DRILLERS' LOG

DNB DRILLING, INC.
and
KATHOL PETROLEUM, INC.
737 First National Bank Building
Wichita, Kansas

Canon 'A' #1
C SW NE, Sec. 13-21S-19W
Pawnee County, Kansas

Elevation: 2122 K.B.

Commenced: 8-12-69
Completed: 8-20-69

Surface Casing: 282' of
8-5/8" cemented w/165 sx
cement, 5% cc. 8-12-69

FORMATIONDEPTH

Surface Hole	288
Shale and Sand	1245
Anhydrite	1270
Shale and Lime	2110
Lime and Shale	2460
Lime	2520
Lime and shale	3474
Shale and lime	3734
Lime	4057
Lime and shale	4105
Shale and lime	4205
Conglomerate	4275
Lime	4310 T.D.

I do hereby certify that the foregoing statements are true and correct to the best of my knowledge and belief.

DNB DRILLING, INC.

James L. Donelson
JAMES L. DONELSON

STATE OF KANSAS: ss:

Subscribed and sworn to before me, the undersigned, a Notary Public in andfor said State, this 22nd day of August, 1969.

Ella Priess
Ella Priess, Notary Public

My Commission Expires:
August 25, 1972

