

STATE OF KANSAS  
STATE CORPORATION COMMISSION


WELL PLUGGING RECORD

Give All Information Completely  
Make Required Affidavit  
Mail or Deliver Report to:  
Conservation Division  
State Corporation Commission  
800 Bitting Building  
Wichita, Kansas

OR  
FORMATION PLUGGING RECORD

Strike out upper line  
when reporting plugging  
of formations.

NORTH

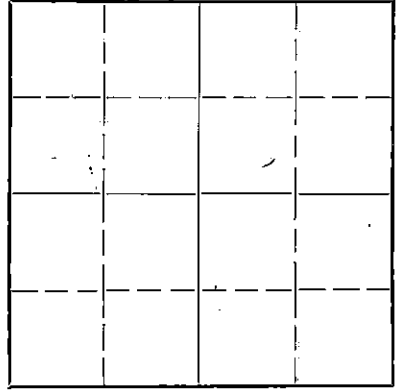

Locate well correctly on above  
Section Plat

Pawnee County, Sec. 24 Twp. 21 Rge. 19 (E) (W)  
Location as "NE 1/4 NW 1/4 SW 1/4" or footage from lines SEC  
Lease Owner S. A. Murphy  
Lease Name Wendel Well No. 1  
Office Address Wichita, Ks.  
Character of Well (completed as Oil, Gas or Dry Hole) Dry Hole  
Date well completed 11/24/44 19 44  
Application for plugging filed 11/24 19 44  
Application for plugging approved 11/24 19 44  
Plugging commenced 11/24 19 44  
Plugging completed 11/24 19 44  
Reason for abandonment of well or producing formation Dry Hole

If a producing well is abandoned, date of last production 19  
Was permission obtained from the Conservation Division or its agents before plugging was commenced? Yes

Name of Conservation Agent who supervised plugging of this well Kerr  
Producing formation Depth to top Bottom Total Depth of Well 4204 Feet  
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8	905'	None

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hold. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

Plugged, filled hole with heavy mud to bottom of surface pipe, put in wood plug and 15 sacks of cement. Filled with heavy mud to 25' of top, put in wood plug and 10 sacks of cement.

11-30-44

PLUGGING  
WELL 24 21 19E  
BOOK PAGE 140 30

STATE CORPORATION COMMISSION  
NOV 30 1944

(If additional description is necessary, use BACK of this sheet)

Correspondence regarding this well should be addressed to S. A. Murphy  
Address Wichita, Ks.

STATE OF Kansas, COUNTY OF Russell, ss.  
C. L. Roberts (employee of owner) or (owner or operator) of the above-described well,  
being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) C. L. Roberts  
Russell (Address)

SUBSCRIBED AND SWORN to before me this 24th day of November, 19 44  
Genevieve Foster  
Notary Public.

My commission expires July 2, 1945

S. A. Murphy  
Wendel #1

Sec. 24 Twp. 21 Rge. 19  
County: Pawnee, Kansas

Total Depth: 4204'  
Comm: 10/30/44 Comp: 11/24/44

Casing  
43 Jts. 8 5/8" Set at 905'

Cement  
600 Sacks

Formation:	Depth:
Iron, Shale, & Shells	230'
Shale, Shells, & Iron	300'
Shale & Shells	475
Shale	515
Shale & Shells	600
Shale & Sand	750
Shale & Red Bed	795
Sand & Shale	835
Shale & Red Sand Rock	880
Shale & Shells	905
Shale & Red Bed	1155
Shale & Shells	1385
Shale & Salt	1570
Shale	1810
Shale & Anhydrite	2070
Lime	2120
Lime & Shale	2355
Lime	2475
Lime & Shale	3505
Lime	3605
Lime	3635
Shale & Lime	3695
Lime	3945
Shale & Lime	3985
Lime	4020
Lime & Shale	4045
Chert, Shale & Lime	4085
Lime & Shale	4135
Lime & Chert	4175
Shale & Lime	4204


State of Kansas )  
                              ) SE  
Russell County )

I hereby certify that the above information is true and correct to the best of my knowledge.

Clara Hummel  
Bkpr.

Subscribed and sworn to before me this 24<sup>th</sup> day of November, 1944.

Genevieve Pool  
Notary Public  
My comm. expires 7/2/45



PLUGGING  
FILE 24 21 19E  
BOOK PAGE 140 LINE 30