

WELL PLUGGING RECORD


STATE OF KANSAS
 STATE CORPORATION COMMISSION
 Give All Information Completely
 Make Required Affidavit
 Mail or Delivered Report to:
 Conservation Division
 State Corporation Commission
 800 Bitting Building
 Wichita, Kansas

FORMATION PLUGGING RECORD

Strike out upper line
 when reporting plug-
 ging off formations.

Stafford County. Sec. 1 Twp. 22S Rge. 12 (W)

Location as "NE $\frac{1}{4}$ NW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines CE $\frac{1}{2}$ NE NE
 Lease Owner PETROLEUM, INC.
 Lease Name Mellies "A" Well No. 3
 Office Address 100 Derby Building, Wichita 2, Kansas
 Character of Well (completed as Oil, Gas or Dry Hole) Oil
 Date well completed 5-15 1949
 Application for plugging filed 11-14 1949
 Application for plugging approved 11-7 1949
 Plugging commenced 10-25 1949
 Plugging completed 11-4 1949
 Reason for abandonment of well or producing formation Non-commercial

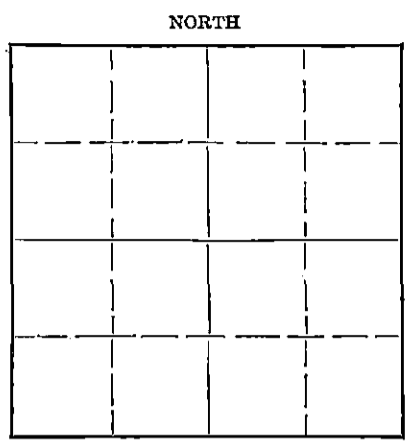

Locate well correctly on above
 Section Plat

If a producing well is abandoned, date of last production August 1949
 Was permission obtained from the Conservation Division or its agents before plugging was com-
 menced? Yes

Name of Conservation Agent who supervised plugging of this well C.D. Stough, Box 207, Great Bend, Kansas
 Producing formation Lansing Depth to top Bottom Total Depth of Well 3580 Feet
 Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
				8 5/8"	251'	None
				5 1/2"	3579	2420

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Dumped five sacks of cement at bottom
 of hole. Pulled pipe and mudded hole
 to 250'. Put fifteen sacks of cement
 at 250'. Finished mudding hole and
 put five sacks of cement at top of
 surface.

11-15-49
 RECEIVED
 NOV 15 1949
 STATE OF KANSAS
 CONSERVATION DIVISION

(If additional description is necessary, use BACK of this sheet)
 Correspondence regarding this well should be addressed to PETROLEUM, INC.
 Address 100 Derby Building, Wichita 2, Kansas

STATE OF KANSAS, COUNTY OF SEDGWICK, ss.

Eric H. Jager (employee of owner) or (owner or operator) of the above-described well,
 being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-
 described well as filed and that the same are true and correct. So help me God.

(Signature) Eric H. Jager
100 Derby Building, Wichita 2, Kansas
 (Address)

SUBSCRIBED AND SWORN to before me this 14th day of November, 1949

Marjorie Bradshaw
 Notary Public.

My commission expires October 27, 1952

PLUGGING
 FILE SEC-1 T22R14
 BOOK PAGE 123 LINE 2

WELL LOG

J. D. FERRELL OIL CO., INC.,
 & PETROLEUM, INC.
 WELL NO. "A" 3

Sec. 1; T-22; R-12
 0 NE/4 NE/4
 County: Stafford

Total Depth - 3580'

Comm: 4-1-49 Comp: 4-16-49

Elevation: 1792'

Contractor: J. D. Ferrell Drilling Co., Inc.

Production: Well

Issued: 4-18-49 Rotary O-3580'

Casing: 8 5/8" - 251' cemented with 175 ssx; circulated.
 5 1/2" - 3578' cemented with 100 ssx bulk cement.

Figures Indicate Bottom of Formations:

cellar	5
sand	60
shale & sand	120
shale & shells	252
Red bed & shale	320
shale & shells	570
Anhydrite	615
shale & shells	1040
shale & salt, shells	1330
shale & lime	1450
lime	1480
broken lime	1585
lime & shale	1675
lime	1810
shale & lime	1955
broken lime	2105
lime & shale	2260
shale & shells	2365
shale	2565
shale & shells	2855
shale & lime	2870
lime	3010
lime & shale	3090
lime	3495
lime & chert	3515
chert	3539
shale, sand, shells	3565
shale & lime	3580
Total Depth	3580

TOPS:	
Heebner	3059
Br. lime	3189
Kansas City	3214
Viola	3492
Simpson shale	3533
Arbuckle	3578
Total Depth	3580

We hereby certify this to be a correct and accurate log of the above described well as shown by the Daily Drilling Reports.

J. D. FERRELL DRILLING COMPANY, INC.,

By: J. W. Linsbach
 J. W. Linsbach - Sec. Treas.

Subscribed and sworn to before me this 13th day of April, 1949.

My Commission Expires:

October 15, 1951

NOV 15 1949
 STATE OF KANSAS
Mark V. Davidson
 Notary Public

PLUGGING
 SEC-1-T-22-R-170
 BOOK PAGE 172 LINE 2