


Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
800 Biting Building
Wichita, Kansas

WELL PLUGGING RECORD

Stafford County, Sec. 1 Twp. 22 Rge. 12W (E) (W)

Location as "NE/CNW $\frac{1}{4}$ SW $\frac{1}{4}$ " or footage from lines SW SW SE
Lease Owner Laura Jane Oil Co., Inc.
Lease Name Helmers Well No. 1-A
Office Address 817 Central Building, Wichita, Kansas
Character of Well (completed as Oil, Gas or Dry Hole) dry hole
Date well completed 10/21/51 19
Application for plugging filed 10/21/51 19
Application for plugging approved 10/21/51 19
Plugging commenced 10/21/51 7:00 PM 19
Plugging completed 10/21/51 9:00 PM 19
Reason for abandonment of well or producing formation no shows

NORTH

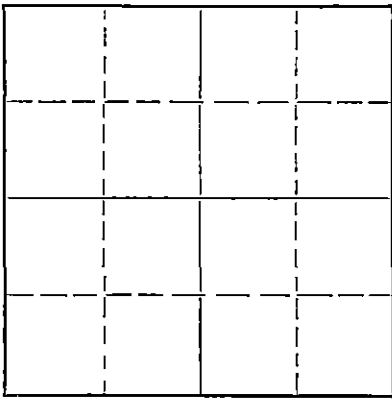

Locate well correctly on above Section Plat

If a producing well is abandoned, date of last production 19
Was permission obtained from the Conservation Division or its agents before plugging was commenced? yes

Name of Conservation Agent who supervised plugging of this well Mr. Stough, Great Bend, Kansas
Producing formation None Depth to top Bottom Total Depth of Well 3577 Feet
Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

Formation	Content	From	To	Size	Put In	Pulled Out
sand & surface soil	water	0	80			
red rock		80	135			
shale & lime shells		135	165	8 5/8	165	cemented

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from feet to feet for each plug set.

filled hole with heavy mud to bottom of 8 5/8" casing 165' set wood plug 1/2 sack hulls 15 sacks cement. Fill hole to within 20' bottom of cellar. Set wood plug 1/2 sack hulls, 10 sacks cement 8 5/8" casing cut off in bottom of cellar.

(If additional description is necessary, use BACK of this sheet)
Name of Plugging Contractor Laura Jane Oil Co., Inc.
Address 817 Central Building, Wichita, Kansas

STATE OF Kansas, COUNTY OF Sedgwick, ss.
Joe Jacobs (employee of owner) or (owner or operator) of the above-described well,

being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) Joe Jacobs
Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN to before me this 25th day of October, 1951.

My commission expires 6/28/52 Notary Public.

PLUGGING
FILE SEC LTV RLV
BOOK PAGE 44 LINE 45

RECEIVED
OCT 27 1951
CONSERVATION DIVISION
WICHITA, KANSAS
10-27-51

