

STATE OF KANSAS
STATE CORPORATION COMMISSION
200 Colorado Derby Building
Wichita, Kansas 67202

WELL PLUGGING RECORD
K.A.R.-82-3-117

15-055-00793-0000

API NUMBER 11/8/52

LEASE NAME J.J. Meyer

WELL NUMBER 1

SPOT LOCATION 200' W & 150' S of Center

SEC. 3 TWP. 23 RGE. 33 (X) or (W)

COUNTY Finney

Date Well Completed 12/15/52

Plugging Commenced 4/17/90

Plugging Completed 4/17/90

TYPE OR PRINT
NOTICE: Fill out completely
and return to Cons. Div.
office within 30 days.

LEASE OPERATOR ENSLIGN OPERATING Co.
621 Seventeenth St., Ste 1800
ADDRESS Denver, Co. 80293

PHONE (303) 293-9999 OPERATORS LICENSE NO. 04782

Character of Well _____
(Oil, Gas, D&A, SWD, Input, Water Supply Well)

Did you notify the KCC/KDHE Joint District Office prior to plugging this well? Yes

Which KCC/KDHE Joint Office did you notify? Dodge City

Is ACO-1 filed? No If not, is well log attached? Yes - to form CP-1

Producing formation Chase Depth to top 2514' bottom 2593' T.D. 2593'

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS | CASING RECORD

Formation	Content	From	To	Size	Put in	Pulled out
<u>Surface</u>				<u>8 7/8"</u>	<u>336'</u>	<u>0</u>
<u>Production</u>				<u>5 1/2"</u>	<u>2573'</u>	<u>0</u>

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used state the character of same and depth placed, from feet to feet each set. Mud from 1565' to 0'; Cement from 1565' to 1065'; Cement from 335' to 3'; Cut off and capped. Surface and Production casing 3' below ground level.

(If additional description is necessary, use BACK of this form.)

Name of Plugging Contractor Post and Mastin Well Service License No. 8438
Address P.O. Box 297; Garden City, Ks. 67846

STATE OF Kansas COUNTY OF Finney, ss.

Reed A. Wacker (employee of operator) or (operator) of above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed that the same are true and correct, so help me God.

(Signature) Reed A. Wacker
(Address) Box 937, Garden City, Ks. 67846

RECEIVED
04-19-90
APR 19 1990

IOLA L. UPCHURCH
NOTARY PUBLIC
STATE OF KANSAS
My Appt. Expires 11/21/91

AS DESCRIBED AND SWORN TO before me this 18th day of April, 19 90

Iola L. Upchurch
Notary Public

My Commission expires: 11/21/91

15-055-00793-0000

Plug To Abandon Procedure

J. J. Meyer 1

200' W. & 150' S. of Center, of Sec. 3-T235-R33W

Finney County, Kansas

1. Move in and rig up workover rig. Lay down 1 $\frac{1}{4}$ " tubing string and transfer tubing to yard storage.
2. Pick up 2 $\frac{3}{8}$ " tubing (work string) and run in hole to 2593' T.D.

Plug to abandon, as follows:

- a. Circulate hole with 100 bbls of water containing 15 oz. of bentonite gell and 2 oz. of cotton seed hulls;
- b. Circulate 50 oz of cement to spot from 2400' back to 1900', Cement - 60/40 Pozmix, 2% gell;
- c. Circulate 50 oz of cement to spot from 1450' back to 950', Cement - 60/40 Pozmix, 2% gell;
- d. Circulate 35 oz of cement to spot from 335' back to 3', Cement - 60/40 Pozmix, 2% gell; and
- e. Pressure up on surface casing, if surface casing takes fluid, pump 50 oz of cement thru surface casing, Cement - 60/40 Pozmix, 2% gell.
- f. Cut off, and cap surface casing and production casing 3' below ground level, and clean up location.

STATE OF KANSAS
MAR 26 1990

CURTIS

ENSIGN OPERATING Co.

16-055-00793-0000

J. J. Meyer 1

200' W. & 150' S. of Center, Sec. 3-T23S-R33W

FINNEY COUNTY, KANSAS

Elev: 2871' Gr.; 2876' KB


Surf. Csg.: 8 5/8", 24 lb. at 336'

Tubing: 1 1/4" LP w/ Gas Lift Values set at ? →

Perf's: Herrington & Krider, 2514 to 2552'
Winfield, 2573 to 2593' (open hole)

Prod. Csg.: 5 1/2", 14 lb. at 2573'

RTD: 2593' 2.6 1990

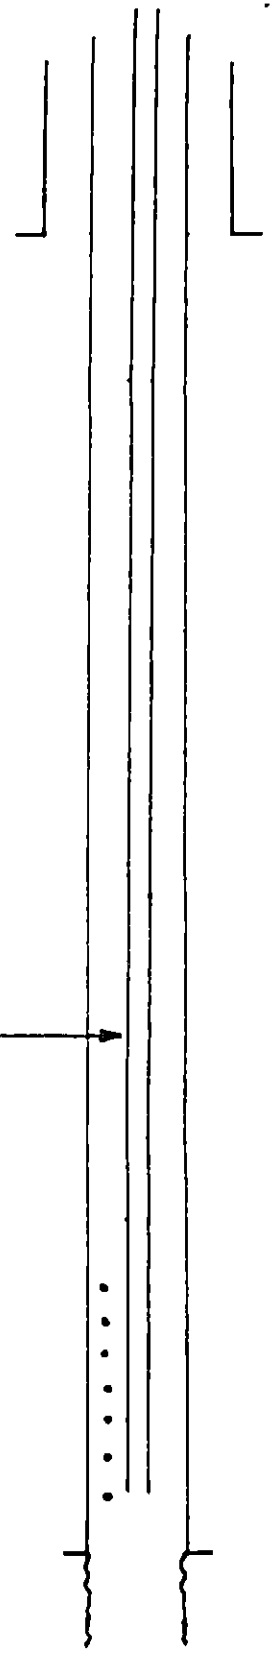

CONTRACT NUMBER 16-055-00793-0000
Wichita, Kansas