

STATE OF KANSAS
STATE CORPORATION COMMISSION

Form CP-4

Give All Information Completely
Make Required Affidavit
Mail or Deliver Report to:
Conservation Division
State Corporation Commission
P. O. Box 17027
Wichita, Kansas 67217
NORTH

WELL PLUGGING RECORD

Barton County, Sec. 25 Twp. 19 Rge. 14 (E) (W) x

Location as "NE/CNW/SW" or footage from lines NE NE SE

Lease Owner Thomas H. Allan

Lease Name Clarke Well No. #2

Office Address 925 Union Center Wichita, Kansas

Character of Well (completed as Oil, Gas or Dry Hole) _____

Date well completed _____ 19__

Application for plugging filed 2-2-72 19__

Application for plugging approved _____ 19__


Plugging commenced 3-11-72 19__

Plugging completed 3-14-72 19__

Reason for abandonment of well or producing formation _____

If a producing well is abandoned, date of last production _____ 19__

Was permission obtained from the Conservation Division or its agents before plugging was commenced? _____

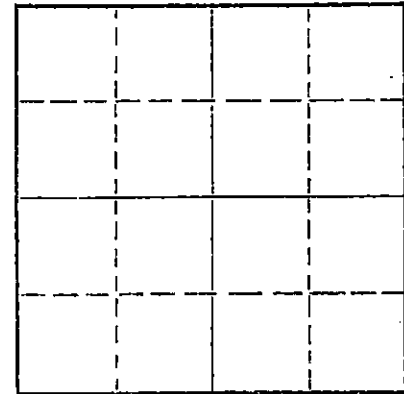

Locate well correctly on above Section Plat

Name of Conservation Agent who supervised plugging of this well Donald Truan

Producing formation _____ Depth to top _____ Bottom _____ Total Depth of Well 3320' Feet

Show depth and thickness of all water, oil and gas formations.

OIL, GAS OR WATER RECORDS

CASING RECORD

FORMATION	CONTENT	FROM	TO	SIZE	PUT IN	PULLED OUT
				5 1/2"	3315'	1818.11'
				8 5/8"	765'	

Describe in detail the manner in which the well was plugged, indicating where the mud fluid was placed and the method or methods used in introducing it into the hole. If cement or other plugs were used, state the character of same and depth placed, from _____ feet to _____ feet for each plug set.

Made bottom hole plug back with sand to 3300'. Mixed and ran 5 sacks cement thru dump hauler.
Squeezed hole with 3 sacks hulls - 20 sacks gel. Released plug and displaced with 125 sacks 50/50 pozmix with 2% gel.

3-15-72

RECEIVED
STATE CORPORATION COMMISSION
MAR 15 1972
CONSERVATION DIVISION
Wichita, Kansas

(If additional description is necessary, use BACK of this sheet)

Name of Plugging Contractor Southwest Casing Pulling Co.

Address Box 364 Great Bend, Kansas

STATE OF Kansas, COUNTY OF Barton, ss.


Southwest Casing Pulling Co. (employee of owner) or (owner or operator) of the above-described well, being first duly sworn on oath, says: That I have knowledge of the facts, statements, and matters herein contained and the log of the above-described well as filed and that the same are true and correct. So help me God.

(Signature) W. C. Spencer Sec

Box 364 Great Bend, Kansas
(Address)

SUBSCRIBED AND SWORN TO before me this 14 day of March, 19 72

My commission expires October 1972



Sidney D Miller
Notary Public.

8 5/8" @ 765 - 275 sz
5 1/2" @ 3315 - 100 sz

ALLAN, et al #2 CLARKE
NE NE SE 25-19-14W
Barton County, Kansas
COMM: 5/27/52 COMPL: 6/12/52
CONTRACTOR: Tom Allan
ELEVATION: 1866 DF
1868 RB
I. P. Swab 12 to 15 DOPH

Depth from Rotary Bushings

0 - 15 Surface Soil
120 Sand
280 Gray Shale
305 Sand
764 Red Beds
768 Anhydrite
1180 Red & Gray Shale with
Anhydrite Stringers
1280 Gray Shale
1500 Shale & Salt
1600 Shale, Salt & Anhydrite
1740 Shale & Anhydrite
1760 Shale
2380 Lime & Shale
2780 Shale & Shells
3118 Lime & Shale
3185 Shale
3315 (RTD) Lime with Shale
breaks
3315RB = 3313DF

3315DF Blue Shale
3317DF Dense Brown Lime
3320DF (TD) White oolitic Lime - Show Oil

FORMATIONS:

Anhydrite 764RB
Heebner 3085RB
Brown Lime 3185RB
Lansing 3197RB

TESTING:

Swab 1.20 bbl. Oil per hour
Acidize with 2000 gal. Acid
Swab 12 to 15 bbl. Oil per hour

RECEIVED
STATE CORRUPTION COMMISSION
FEB 3 1977
CONSERVATION DIVISION
Topeka, Kansas